

Goodcat Technology KG



Add.: Favoritenstraße 155-157/I, 1100 Wien

Tel: 0664 887 887 68

E-Mail: office@goodcat.at

E-Mail: support@goodcat.at


Homepage: www.goodcat.at



Linear Lighting For All Applications


SCENCE

- 1 Hotel
- 2 Living space
- 3 Office building
- 4 Retail stores
- 5 Sport & recreation
- 6 Art & culture
- 7 Public area
- 8 Station hall
- 9 Transport
- 10 Underwater
- 11 Outdoor
- 12 Facade lighting

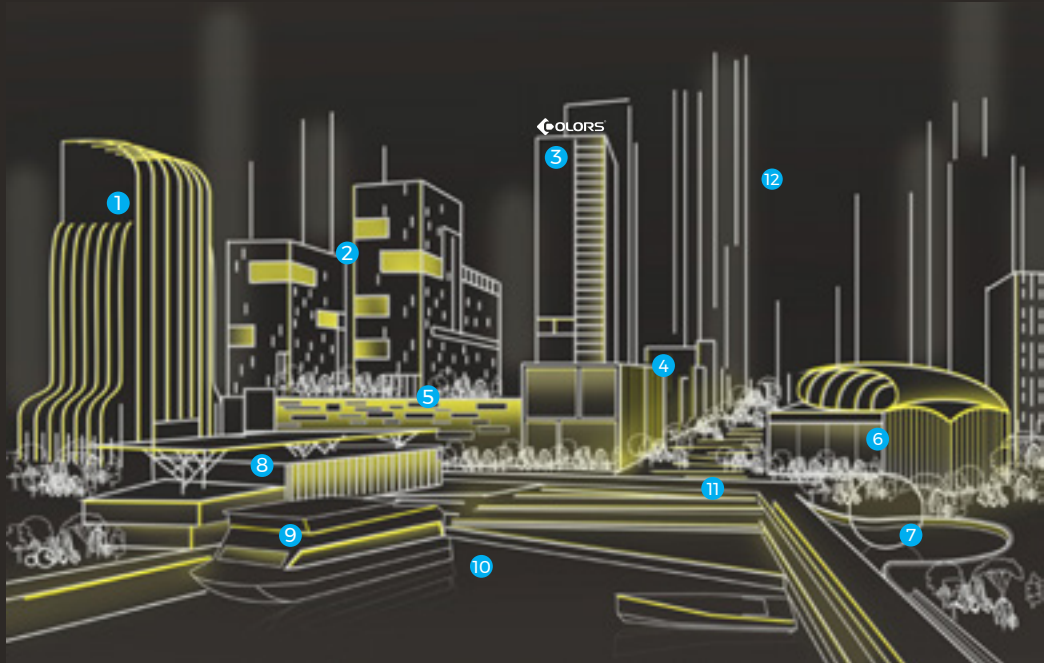


INDOOR & OUTDOOR

- 1 Outline lighting
- 2 Cove lighting
- 3 Indoor lighting
- 4 Wall washing
- 5 Wall grazing (downward)
- 6 Wall grazing (upward)
- 7 Stairs lighting
- 8 Beach-side lighting
- 9 Water-side lighting

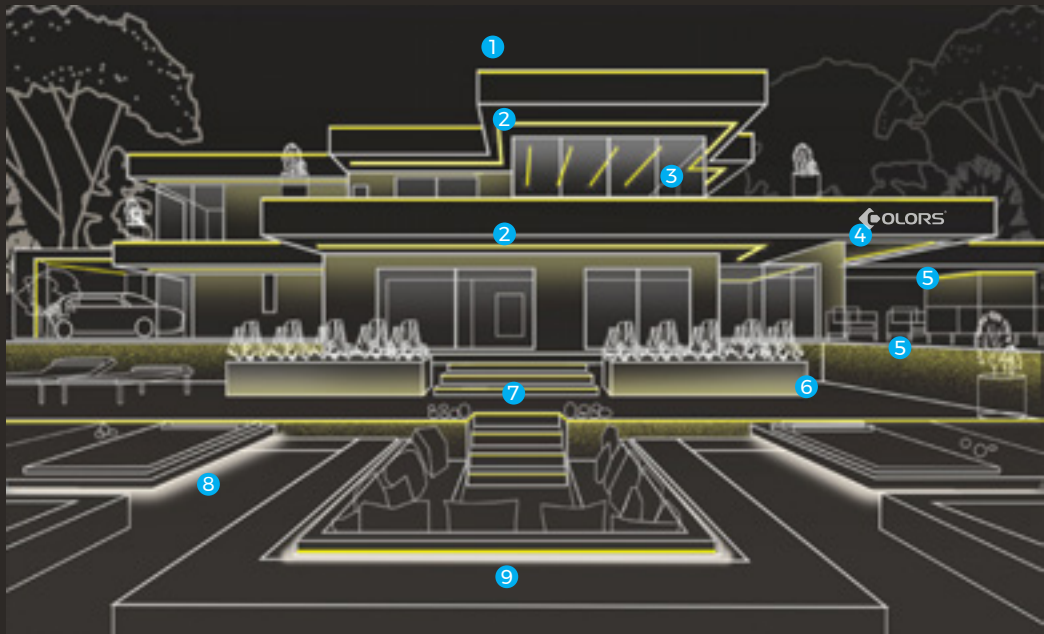

APPLICATION

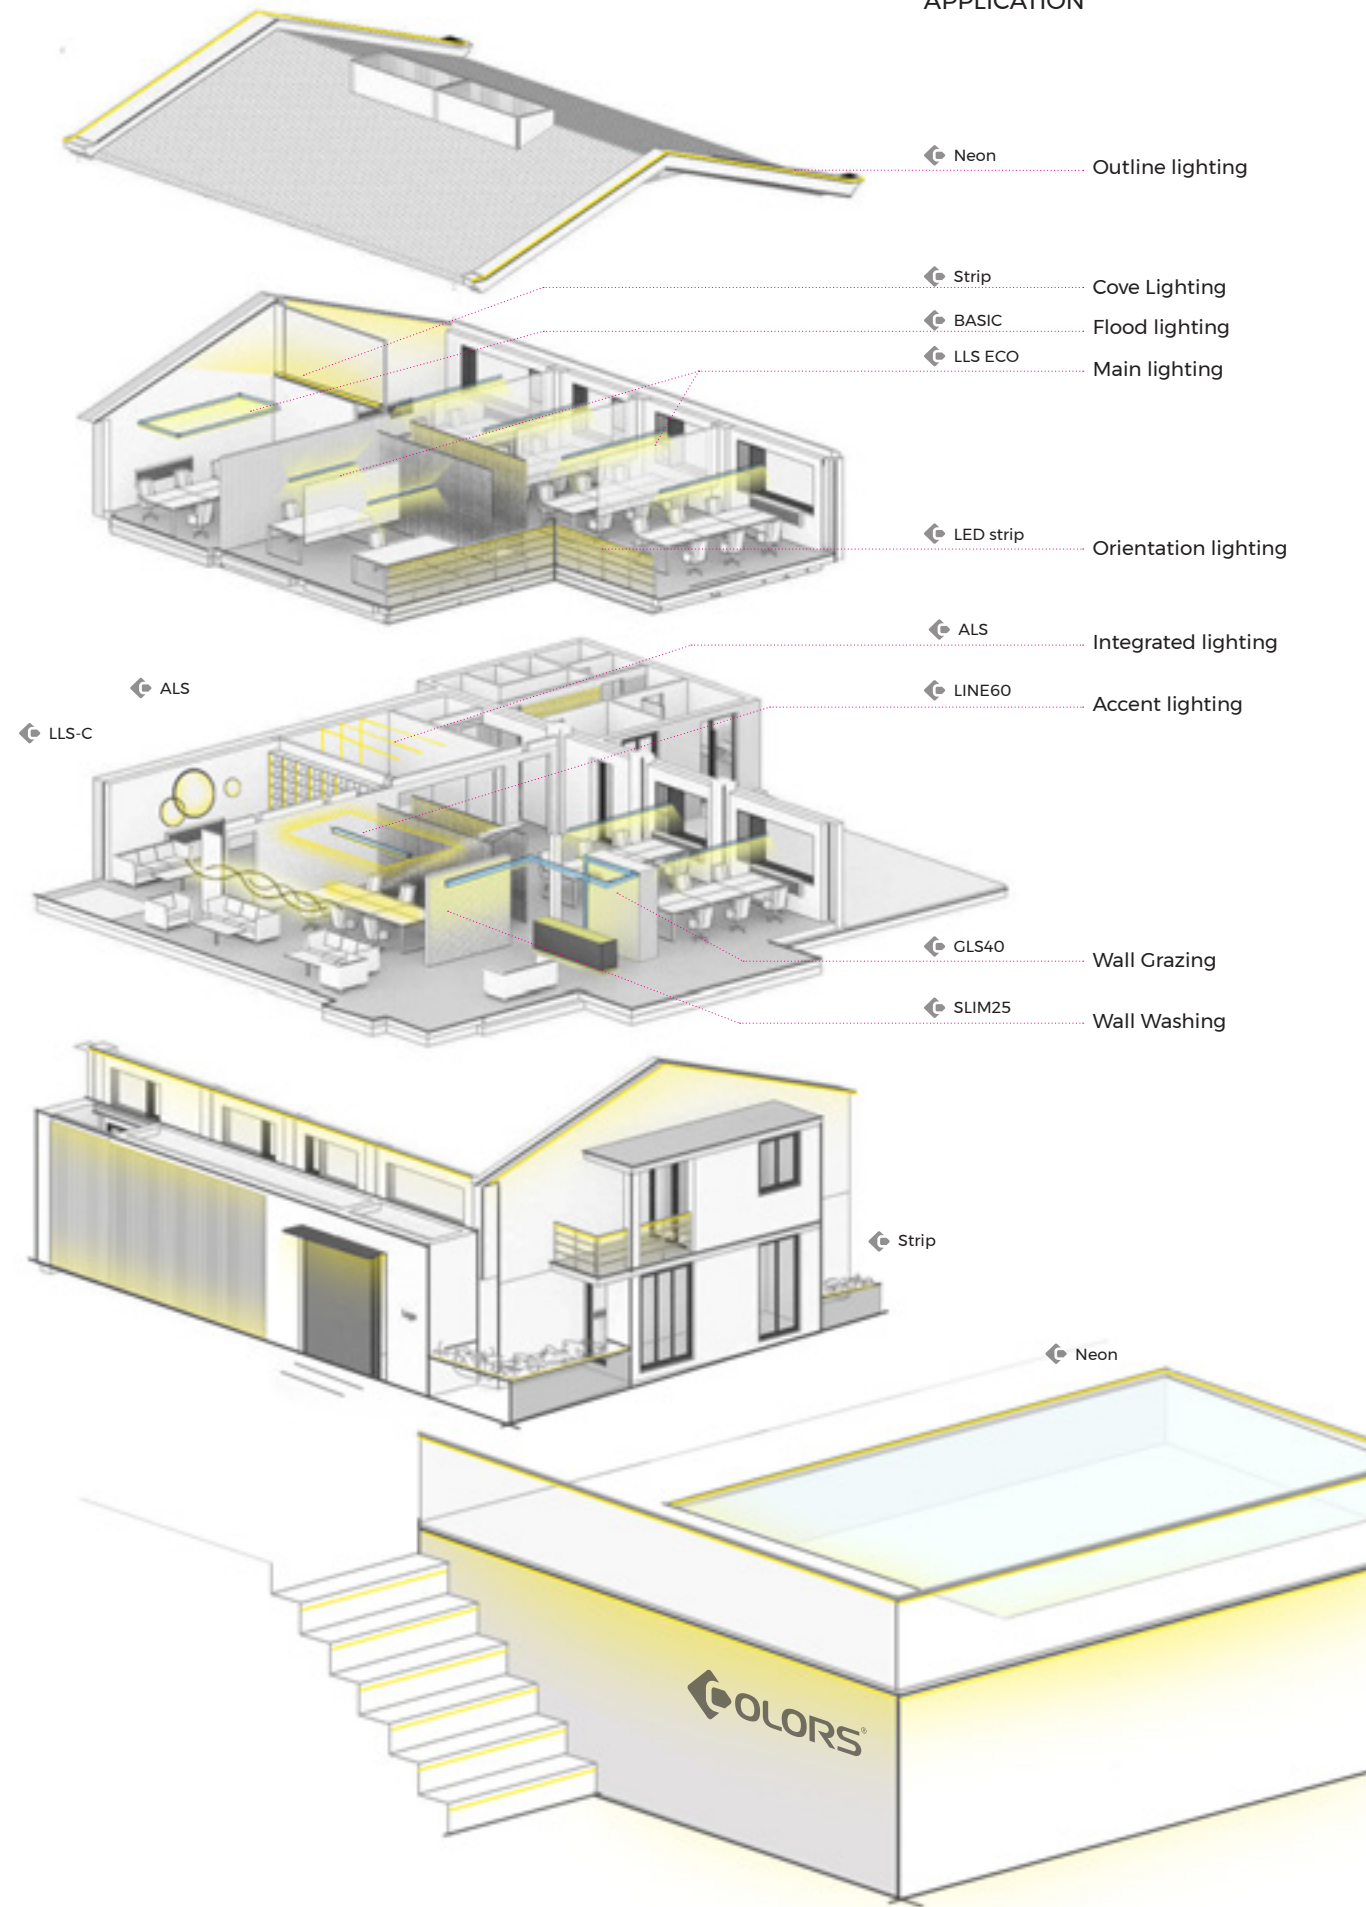

Product System

As a forerunner of linear lighting industry, COLORS keeps expanding the definition and boundary of linear lighting. It explores and develops versatile product portfolios as listed below in the hope of providing comprehensive lighting solutions for residential, office, commercial scenarios and the like.



Silicone Neon Strip

COLORS Silicone Neon Strip adopts bi-color/ tri-color co-extrusion process, featured baby-skin feel in touch and uniform & natural light in function. It shows great resistance to saline solutions, acid & alkali, corrosive gases, fire and UV. The series include Outline Neon for delicate micro-scene outlining, Magic Neon for innovative styling and Architecture Neon for facade and under-water lighting.




LED Strip

COLORS LED Strip adopts self-encapsulated LEDs that passed LM80 and TM30 tests. In virtue of protection process such as silicone integrated extrusion and Nano coating, it can achieve IP55, IP65, IP67 protection. It includes ECO Series cost-effective and reliable lights finished by R2R process, PRO Series for professional applications, TONING Series for use in entertaining venues, and VARIO series for specific applications with certain requirements such as wall-washer, sauna etc. The whole series gained CE, CB, UL, UKCA, ROHS, REACH product certifications, assured you of stable quality and functional lights.




Free-Dot System

COLORS Free-Dot System is a newly-introduced 48V ceiling recessed system, which is effective in use and almost invisible in look, catering to the trend of architectural integrated lighting. It is in modular design, allowing different modules to flexibly combine and integrate into ceiling at ease thanks to their mounting method. Professional optics including linear modules, spotlight, smart modules and decorative light can be flexibly used, moved and replaced here easily, satisfying personalized needs to the fullest.

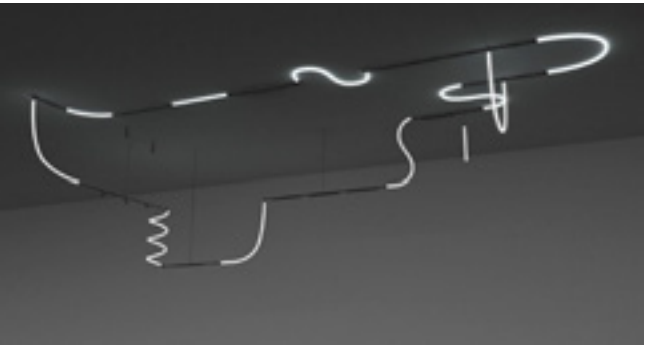

Track System

Track System includes 48VDC TLS-R neon track, TLSE-M20 magnetic track and TLS-S60 super module. They bring together spotlights, flexible and rigid linear lights in one system to achieve unique lighting designs and creative applications. The system can achieve easy splicing, cornering and rotation of track, as well as quick electrical connection of lighting modules in virtue of magnets and a wealth of accessories, a decorative element far beyond lighting purpose indeed.

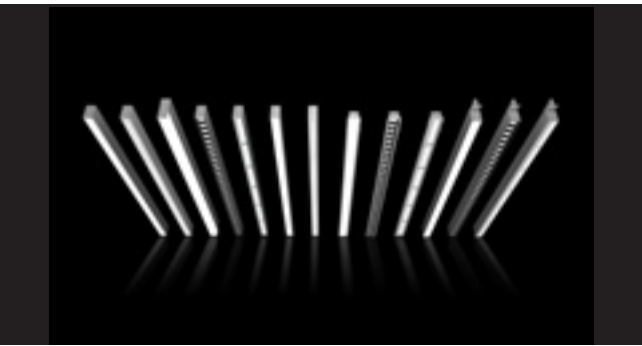

Linear Luminaire

Linear Luminaire, with more professional optical design and anti-glare concept, is featured in deep anti-glare and precise light control. The series include 25-70mm wide linear luminaires and curved luminaire of 0.8/1.5/3m diameter etc., can satisfy professional demands for indoor main lighting, accent lighting and special lighting. Together with sensor modules and smart control, it provides a full set of linear lighting solution for office, residential, commercial, and industrial space.



Downlights

Downlights include Genie professional downlight and Magicube mini grille light. The series is designed miniature, slender and delicate, catering to aesthetic trend of interior design. It emphasizes on light spot, deep anti-glare and natural gradient of light, can achieve accent lighting, flood lighting and wall washing, satisfying differentiated needs for villa mansions, theme hotels, commercial clubs, etc.



Profile

COLORS Profile, premised on flexible linear light source that supports splicing, highlights luminaire structure and optical performance. It distinguishes itself to be an important interior design element, in the hope that linear lights in space can shuttle freely to form creative styling, satisfying both lighting purpose and interior decoration, exuding linear charm to the fullest in space.

NNR25

Magic line NNR25

- 360° uniform lighting
- Bend at will & Arbitrary cutting
- Indoor decorative lighting



reddot winner 2021



TLS-R

TLS-R neon track system

- Track and 360° round neon 2-in-1
- 24+ optical modules
- Magnetic easy installation
- DALI2/ Tuya/ Casambi smart control





HOLA

Free-Dot System

- Recessed on ceiling, delicate in look
- Easy to install and replace
- 23 optics, flexible application

Contents

Silicone Neon Strip HOT	
Outline neon	037
Magic neon	049
Architecture neon	059
LED Strip	
ECO	113
PRO	131
Toning	173
Vario	201
Free-Dot System NEW	
HOLA	216
Track System	
TLS-S60	250
TLS-R	268
TLSE-M20	276
Linear Luminaires	
SLIM25	302
GLS40	344
LINE60	360
BASIC	378
SKYLINE	400
Downlights	
GENIE	413
MAGICUBE	431
Profile	
ALS	456
ALS ECO	534
LLS ECO	548
LLS-C	564

Downlights

COLORS Downlights include Genie professional downlight and Magicube mini grille light. The series is designed miniature, slender and delicate, catering to aesthetic trend of interior design. It emphasizes on light spot, deep anti-glare and natural gradient of light, can achieve accent lighting, flood lighting and wall washing, satisfying differentiated needs for villa mansions, theme hotels, commercial clubs, etc.



Product Series

Downlights include Genie professional downlight and Magicube mini grille light, can satisfy differentiated needs for villa mansions, theme hotels, commercial clubs, etc.


GENIE

GENIE is a professional downlight that can be make higher power in the same size as those on market. It adopts four anti-glare concepts, including hidden light source, condensed light, diffuse lens and dark reflector to achieve UGR<10, assuring you of visual comfort with no glare. It's 25° tilting angle adjustable, can achieve precise accent lighting.



MAGICUBE

MAGICUBE mini grille light is delicate, compact and of linear outlook. It includes 4 optics, including ±20° adjustable round grille, retractable spotlight, flood lighting and wall washer and supports recessed, pre-recessed and surface-mounted installation. It can achieve precise accent lighting, basic lighting and wall washing.

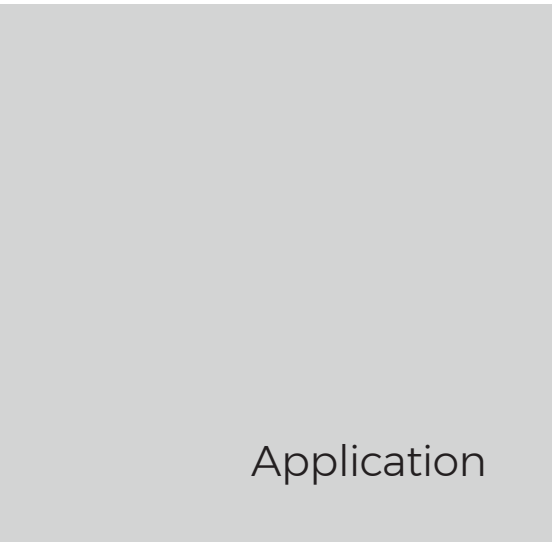


Application



GENIE

GENIE is a professional downlight that can be make higher power in the same size as those on market. It adopts four anti-glare concepts, including hidden light source, condensed light, diffuse lens and dark reflector to achieve $UGR < 10$, assuring you of visual comfort with no glare. It's 25° tilting angle adjustable, can achieve precise accent lighting.

DLE-GEC45L6

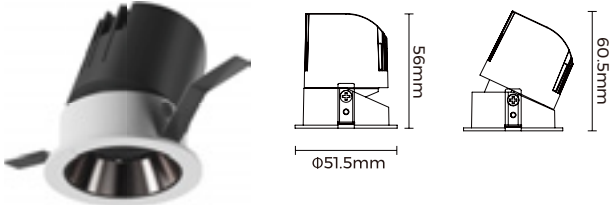


Basic Parameters	
Body structure	Angle adjustable
Aluminum Material	ADC12
Surface Processing	Oil spraying
Optical Cover	Anti-glare diffuser
Installation method	Recessed
Size	Φ51.5x56mm


Customizable



Photo-electric Parameters			
Model	DLE-GEC45L6		
Light Source	COB		
Input Voltage	220-240VAC		
power	6W		
CRI	Ra>90		
CCT	2700K	3000K	4000K
Beam Angle	15°/24°/36°	15°/24°/36°	15°/24°/36°
Luminous Flux (lm)	370/370/370	390/390/390	420/420/420
Light Efficiency (lm/w)	61/61/61	65/65/65	70/70/70

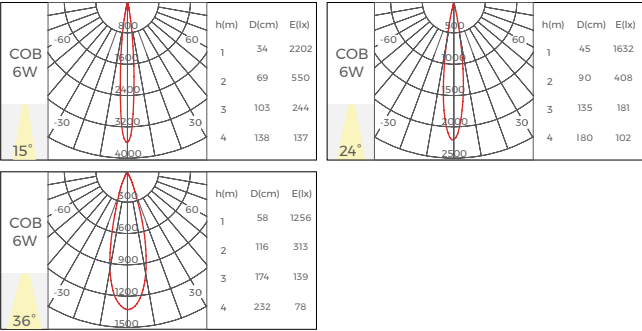

DLE-GEC60L8/10

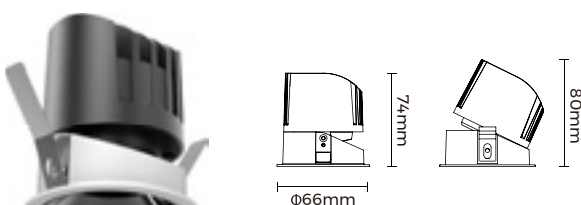

Basic Parameters	
Body structure	Angle adjustable
Aluminum Material	ADC12
Surface Processing	Oil spraying
Optical Cover	Anti-glare diffuser
Installation method	Recessed
Size	Φ66x74mm

Customizable



Photo-electric Parameters			
Model	DLE-GEC60L8		
Light Source	COB		
Input Voltage	220-240VAC		
power	8W		
CRI	Ra>90		
CCT	2700K	3000K	4000K
Beam Angle	15°/24°/36°/50°	15°/24°/36°/50°	15°/24°/36°/50°
Luminous Flux (lm)	510/620/620/620	540/660/660/660	580/700/700/700
Light Efficiency (lm/w)	64/78/78/78	68/83/83/83	73/88/88/88


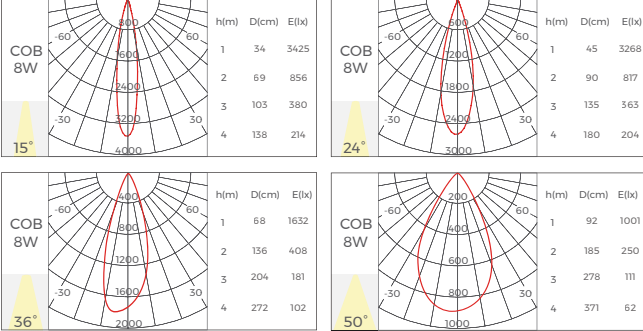



Photo-electric Parameters			
Model	DLE-GEC60L10		
Light Source	COB		
Input Voltage	220-240VAC		
power	10W		
CRI	Ra>90		
CCT	2700K	3000K	4000K
Beam Angle	15°/24°/36°/50°	15°/24°/36°/50°	15°/24°/36°/50°
Luminous Flux (lm)	630/760/760/760	670/800/800/800	710/850/850/850
Light Efficiency (lm/w)	53/76/76/76	67/80/80/80	71/85/85/85



DLE-GEC75L8/10/12/15

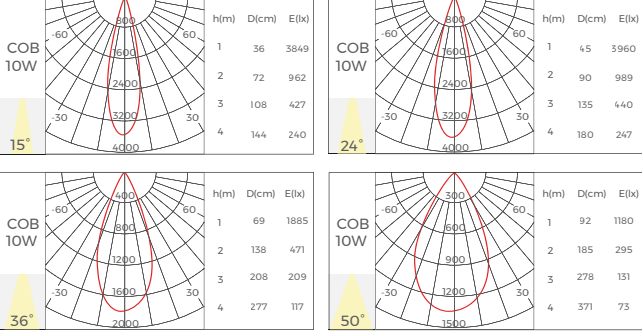

Basic Parameters	
Body structure	Angle adjustable
Aluminum Material	ADC12
Surface Processing	Oil spraying
Optical Cover	Anti-glare diffuser
Installation method	Recessed
Size	Φ81.5x81mm

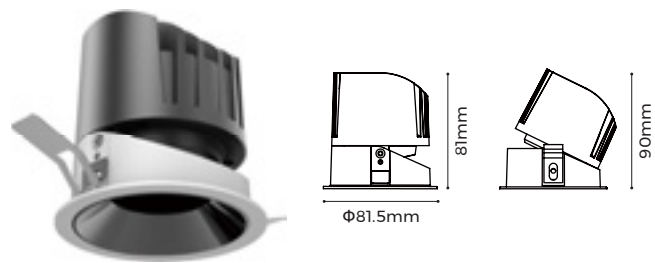

Customizable

0/1-10VTriacZigBeeBluetoothDALI dimmingAdjustable

Photo-electric Parameters			
Model	DLE-GEC75L8		
Light Source	COB		
Input Voltage	220-240VAC		
power	8W		
CRI	Ra>90		
CCT	2700K	3000K	4000K

Beam Angle	15°/24°/36°/50°	15°/24°/36°/50°	15°/24°/36°/50°
Luminous Flux (lm)	640/750/710/640	670/780/750/670	720/830/800/720
Light Efficiency (lm/w)	80/93/88/90	83/97/93/83	90/103/100/90

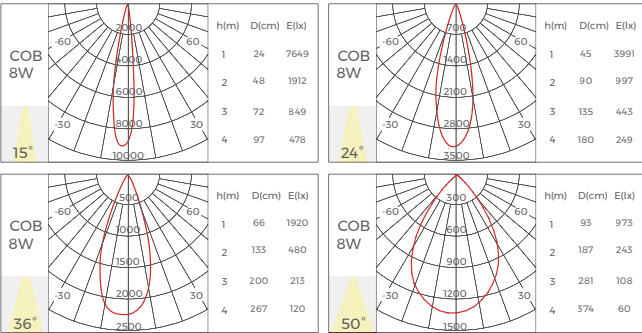


Photo-electric Parameters			
Model	DLE-GEC75L10		
Light Source	COB		
Input Voltage	220-240VAC		
power	10W		
CRI	Ra>90		
CCT	2700K	3000K	4000K

Beam Angle	15°/24°/36°/50°	15°/24°/36°/50°	15°/24°/36°/50°
Luminous Flux (lm)	760/830/830/790	800/880/880/830	850/940/940/890
Light Efficiency (lm/w)	76/83/83/79	80/88/88/83	85/94/94/89

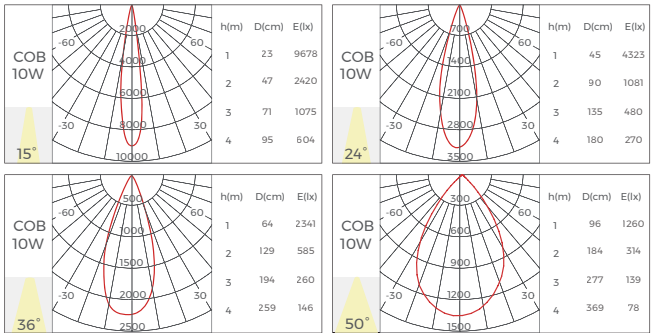


Photo-electric Parameters			
Model	DLE-GEC75L12		
Light Source	COB		
Input Voltage	220-240VAC		
power	12W		
CRI	Ra>90		
CCT	2700K	3000K	4000K

Beam Angle	15°/24°/36°/50°	15°/24°/36°/50°	15°/24°/36°/50°
Luminous Flux (lm)	850/950/950/890	900/1000/1000/940	960/1070/1070/1000
Light Efficiency (lm/w)	71/79/79/74	75/83/83/78	80/89/89/83



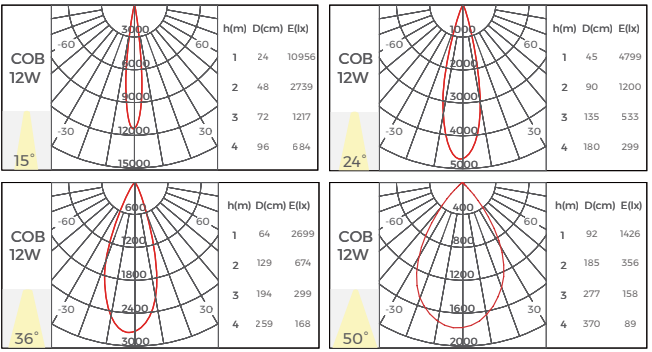


Photo-electric Parameters			
Model	DLE-GEC75L15		
Light Source	COB		
Input Voltage	220-240VAC		
power	15W		
CRI	Ra>90		
CCT	2700K	3000K	4000K

Beam Angle	15°/24°/36°/50°	15°/24°/36°/50°	15°/24°/36°/50°
Luminous Flux (lm)	950/1020/1020/1000	1000/1080/1080/1060	1070/1150/1150/1120
Light Efficiency (lm/w)	63/68/68/66	66/72/72/70	71/76/76/74

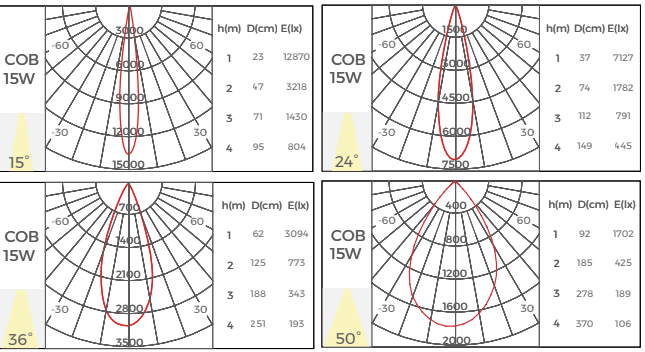


DLE-GEC95L20/25

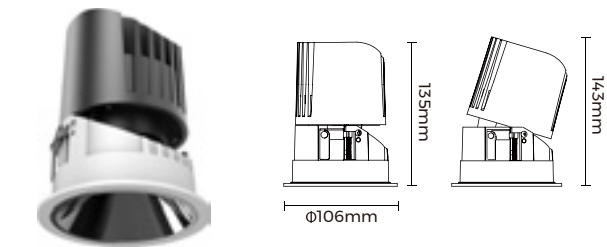

Basic Parameters	
Body structure	Angle adjustable
Aluminum Material	ADC12
Surface Processing	Oil spraying
Optical Cover	Anti-glare diffuser
Installation method	Recessed
Size	Φ106x135mm


Photo-electric Parameters				
Model	DLE-GEC95L20			
Light Source	COB			
Input Voltage	220-240VAC			
power	20W			
CRI	Ra>90			
CCT	2700K	3000K	4000K	
Beam Angle	15°/30°/45°/55°	15°/30°/45°/55°	15°/30°/45°/55°	
Luminous Flux (lm)	1380/1610/1610/1470	1450/1700/1700/1550	1550/1820/1820/1660	
Light Efficiency (lm/w)	69/81/81/74	73/85/85/78	78/91/91/83	

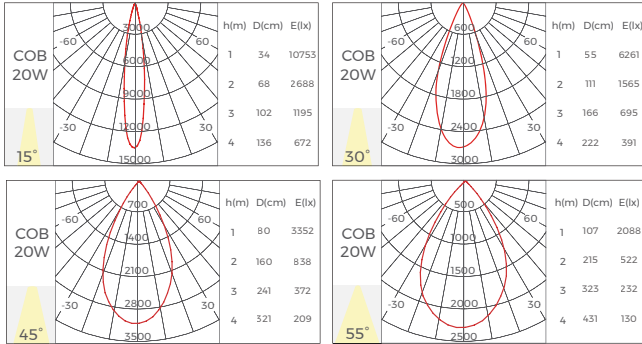


Customizable

0/1-10V Triac ZigBee Bluetooth DALI dimming Adjustable

Photo-electric Parameters				
Model	DLE-GEC95L25			
Light Source	COB			
Input Voltage	220-240VAC			
power	25W			
CRI	Ra>90			
CCT	2700K	3000K	4000K	
Beam Angle	15°/30°/45°/55°	15°/30°/45°/55°	15°/30°/45°/55°	
Luminous Flux (lm)	1600/1900/1900/1740	1680/2000/2000/1830	1800/2140/2140/1960	
Light Efficiency (lm/w)	64/76/76/70	67/80/80/73	72/86/86/78	

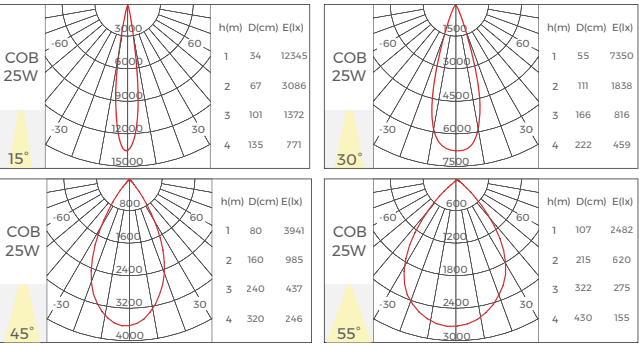

DLE-GRC50L6

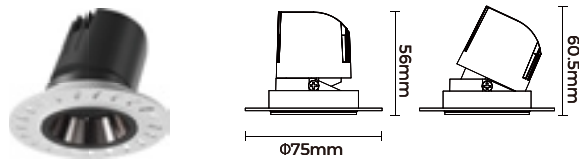


Basic Parameters	
Body structure	Angle adjustable
Aluminum Material	ADC12
Surface Processing	Oil spraying
Optical Cover	Anti-glare diffuser
Installation method	Trimless recessed
Size	Φ75x56mm

Customizable

0/1-10V Triac ZigBee Bluetooth DALI dimming Adjustable

Photo-electric Parameters				
Model	DLE-GEC95L20			
Light Source	COB			
Input Voltage	220-240VAC			
power	6W			
CRI	Ra>90			
CCT	2700K	3000K	4000K	
Beam Angle	15°/24°/36°	15°/24°/36°	15°/24°/36°	
Luminous Flux (lm)	370/370/370	390/390/390	420/420/420	
Light Efficiency (lm/w)	61/61/61	65/65/65	70/70/70	


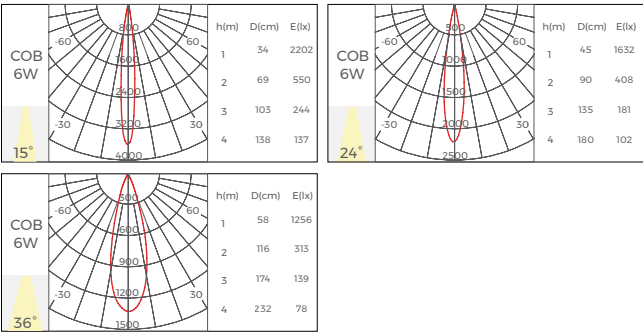


DLE-GRC65L8/10



Basic Parameters	
Body structure	Angle adjustable
Aluminum Material	ADC12
Surface Processing	Oil spraying
Optical Cover	Anti-glare diffuser
Installation method	Trimless recessed
Size	Φ105x74mm


Photo-electric Parameters				
Model	DLE-GRC65L8			
Light Source	COB			
Input Voltage	220-240VAC			
power	8W			
CRI	Ra>90			
CCT	2700K	3000K	4000K	
Beam Angle	15°/24°/36°/50°	15°/24°/36°/50°	15°/24°/36°/50°	
Luminous Flux (lm)	510/620/620/620	540/660/660/660	580/700/700/700	
Light Efficiency (lm/w)	64/78/78/78	68/83/83/83	73/88/88/88	

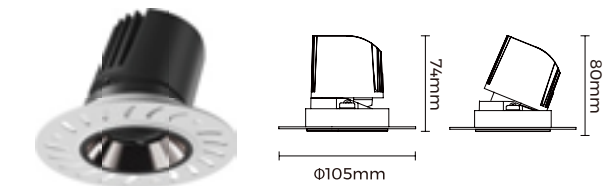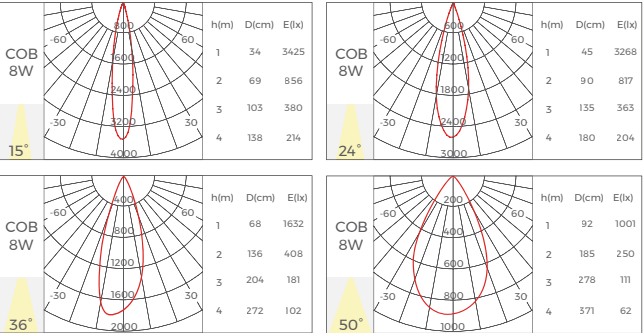

Customizable

0/1-10V Triac ZigBee Bluetooth DALI dimming CCT Adjustable


Photo-electric Parameters				
Model	DLE-GEC65L10			
Light Source	COB			
Input Voltage	220-240VAC			
power	10W			
CRI	Ra>90			
CCT	2700K	3000K	4000K	
Beam Angle	15°/24°/36°/50°	15°/24°/36°/50°	15°/24°/36°/50°	
Luminous Flux (lm)	630/760/760/760	670/800/800/800	710/850/850/850	
Light Efficiency (lm/w)	53/76/76/76	67/80/80/80	71/85/85/85	

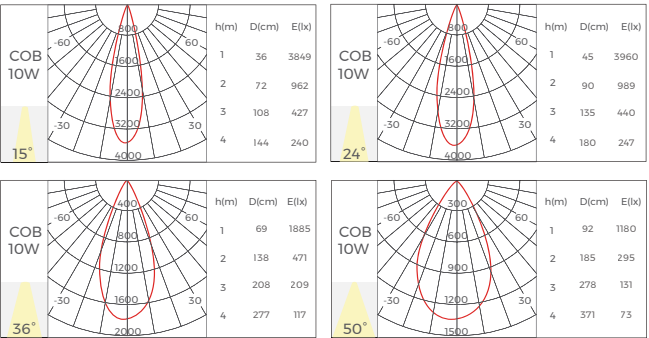

DLE-GRC80L8/10/12/15



Basic Parameters	
Body structure	Angle adjustable
Aluminum Material	ADC12
Surface Processing	Oil spraying
Optical Cover	Anti-glare diffuser
Installation method	Trimless recessed
Size	Φ114x81.2mm

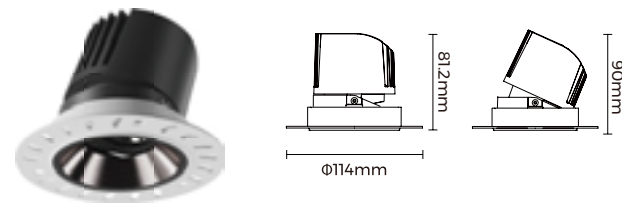

Customizable

0/1-10VTriacZigBeeBluetoothDALI dimmingAdjustable

Photo-electric Parameters				
Model	DLE-GRC80L8			
Light Source	COB			
Input Voltage	220-240VAC			
power	8W			
CRI	Ra>90			
CCT	2700K	3000K	4000K	

Beam Angle	15°/24°/36°/50°	15°/24°/36°/50°	15°/24°/36°/50°	
Luminous Flux (lm)	640/750/710/640	670/780/750/670	720/830/800/720	
Light Efficiency (lm/w)	80/93/88/90	83/97/93/83	90/103/100/90	

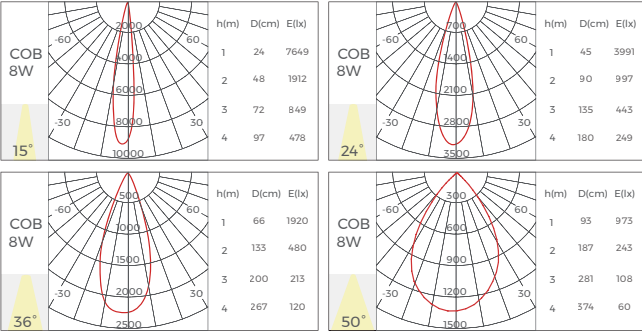


Photo-electric Parameters				
Model	DLE-GRC80L10			
Light Source	COB			
Input Voltage	220-240VAC			
power	10W			
CRI	Ra>90			
CCT	2700K	3000K	4000K	

Beam Angle	15°/24°/36°/50°	15°/24°/36°/50°	15°/24°/36°/50°	
Luminous Flux (lm)	760/830/830/790	800/880/880/830	850/940/940/890	
Light Efficiency (lm/w)	76/83/83/79	80/88/88/83	85/94/94/89	

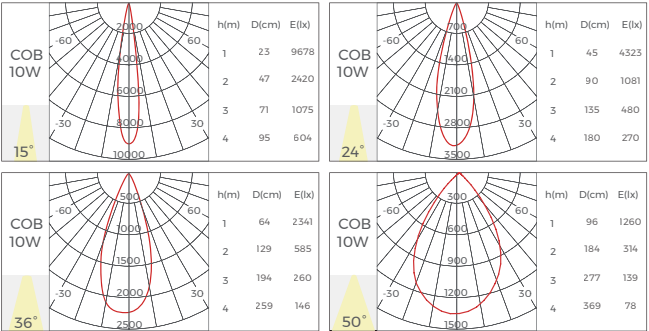


Photo-electric Parameters			
Model	DLE-GRC80L12		
Light Source	COB		
Input Voltage	220-240VAC		
power	12W		
CRI	Ra>90		
CCT	2700K	3000K	4000K

Beam Angle	15°/24°/36°/50°	15°/24°/36°/50°	15°/24°/36°/50°
Luminous Flux (lm)	850/950/950/890	900/1000/1000/940	960/1070/1070/1000
Light Efficiency (lm/w)	71/79/79/74	75/83/83/78	80/89/89/83



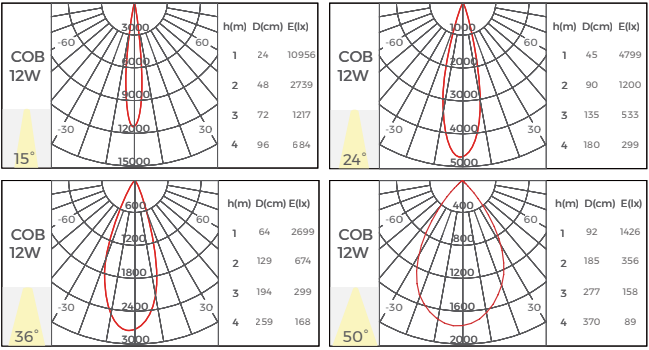


Photo-electric Parameters			
Model	DLE-GRC80L15		
Light Source	COB		
Input Voltage	220-240VAC		
power	15W		
CRI	Ra>90		
CCT	2700K	3000K	4000K

Beam Angle	15°/24°/36°/50°	15°/24°/36°/50°	15°/24°/36°/50°
Luminous Flux (lm)	950/1020/1020/1000	1000/1080/1080/1060	1070/1150/1150/1120
Light Efficiency (lm/w)	63/68/68/66	66/72/72/70	71/76/76/74

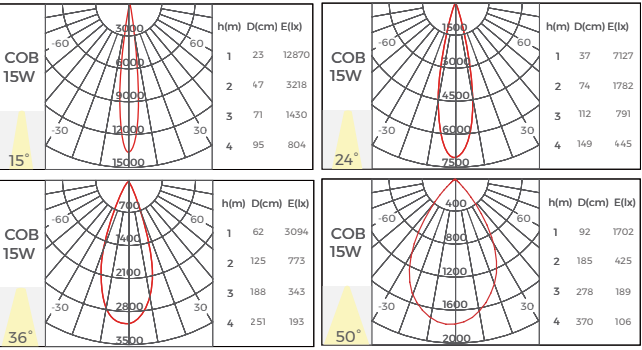


DLE-GRC100L20/25

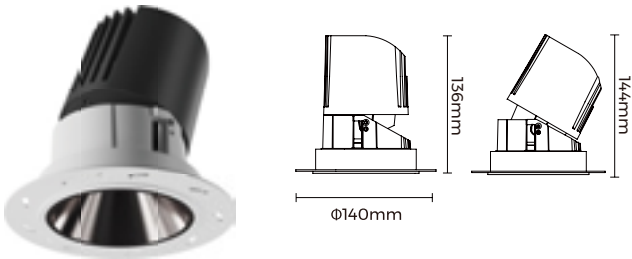

Basic Parameters	
Body structure	Angle adjustable
Aluminum Material	ADC12
Surface Processing	Oil spraying
Optical Cover	Anti-glare diffuser
Installation method	Trimless recessed
Size	Ø140X136mm


Photo-electric Parameters			
Model	DLE-GRC100L20		
Light Source	COB		
Input Voltage	220-240VAC		
power	20W		
CRI	Ra>90		
CCT	2700K	3000K	4000K
Beam Angle	15°/30°/45°/55°	15°/30°/45°/55°	15°/30°/45°/55°
Luminous Flux (lm)	1380/1610/1610/1470	1450/1700/1700/1550	1550/1820/1820/1660
Light Efficiency (lm/w)	69/81/81/74	73/85/85/78	78/91/91/83

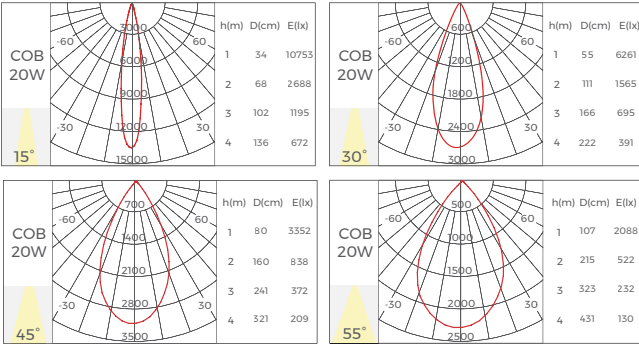

Customizable

0/1-10V Triac ZigBee Bluetooth DALI dimming Adjustable

Photo-electric Parameters			
Model	DLE-GRC100L25		
Light Source	COB		
Input Voltage	220-240VAC		
power	25W		
CRI	Ra>90		
CCT	2700K	3000K	4000K
Beam Angle	15°/30°/45°/55°	15°/30°/45°/55°	15°/30°/45°/55°
Luminous Flux (lm)	1600/1900/1900/1740	1680/2000/2000/1830	1800/2140/2140/1960
Light Efficiency (lm/w)	64/76/76/70	67/80/80/73	72/86/86/78

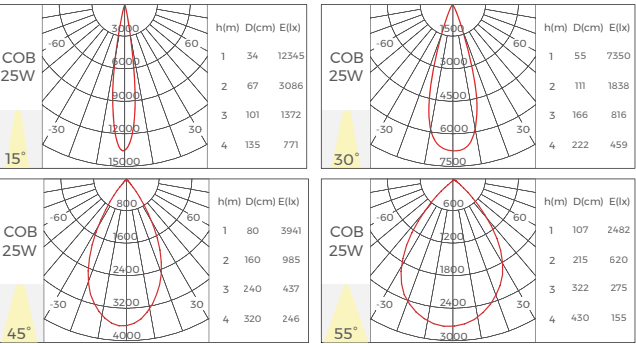

DLE-GET55L6




Basic Parameters	
Body structure	Direct
Aluminum Material	AL6063-T5
Surface Processing	Oil spraying
Optical Cover	Anti-glare diffuser
Installation method	Recessed
Size	Ø62X40mm


Customizable

0/1-10V Triac ZigBee Bluetooth DALI dimming Adjustable

Photo-electric Parameters			
Model	DLE-GET55L6		
Light Source	COB		
Input Voltage	220-240VAC		
power	6W		
CRI	Ra>90		
CCT	2700K	3000K	4000K
Beam Angle	15°/24°/36°	15°/24°/36°	15°/24°/36°
Luminous Flux (lm)	440/470/460	460/490/480	490/520/510
Light Efficiency (lm/w)	73/78/77	77/82/80	82/87/85

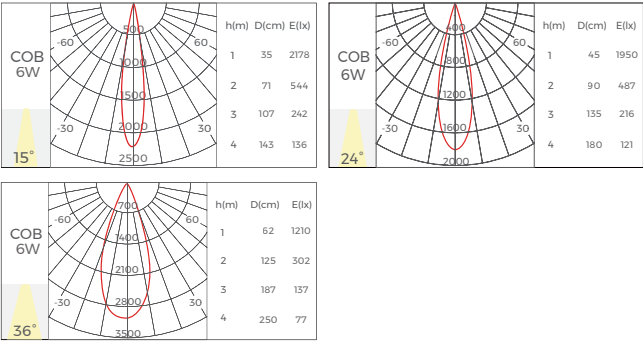


DLE-GET75L12

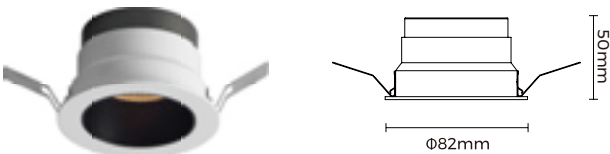


Basic Parameters	
Body structure	Direct
Aluminum Material	AL6063-T5
Surface Processing	Oil spraying
Optical Cover	Anti-glare diffuser
Installation method	Recessed
Size	Φ82X50mm

Photo-electric Parameters			
Model	DLE-GET75L12		
Light Source	COB		
Input Voltage	220-240VAC		
power	12W		
CRI	Ra>90		
CCT	2700K	3000K	4000K
Beam Angle	15°/24°/36°	15°/24°/36°	15°/24°/36°
Luminous Flux (lm)	890/830/740	940/880/780	1000/940/830
Light Efficiency (lm/w)	74/69/62	78/73/65	83/78/69

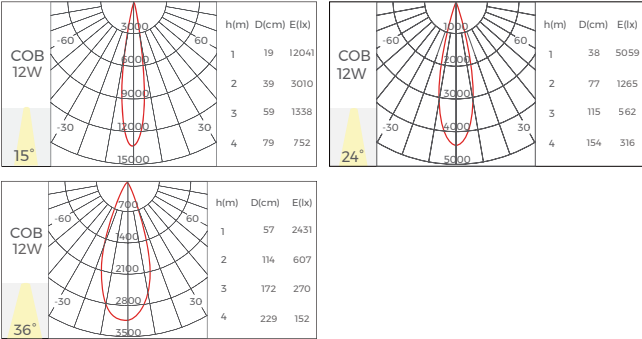


DLE-GET95L18

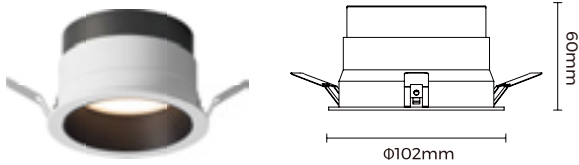


Basic Parameters	
Body structure	Direct
Aluminum Material	AL6063-T5
Surface Processing	Oil spraying
Optical Cover	Anti-glare diffuser
Installation method	Recessed
Size	Φ102X60mm

Photo-electric Parameters			
Model	DLE-GET95L18		
Light Source	COB		
Input Voltage	220-240VAC		
power	18W		
CRI	Ra>90		
CCT	2700K	3000K	4000K
Beam Angle	15°/24°/36°	15°/24°/36°	15°/24°/36°
Luminous Flux (lm)	1260/1350/1260	1300/1400/1300	1380/1490/1380
Light Efficiency (lm/w)	70/75/70	72/78/72	77/83/77

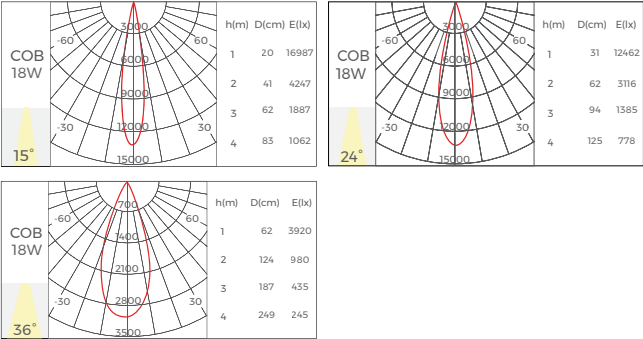

DLE-GET55R6




Basic Parameters	
Body structure	Direct
Aluminum Material	AL6063-T5
Surface Processing	Oil spraying
Optical Cover	Anti-glare diffuser
Installation method	Recessed
Size	Φ62X40mm


Customizable



Photo-electric Parameters				
Model	DLE-GET55R6			
Light Source	COB			
Input Voltage	220-240VAC			
power	6W			
CRI	Ra>90			
CCT	2700K	3000K	4000K	
Beam Angle	60°	60°	60°	
Luminous Flux (lm)	360	380	400	
Light Efficiency (lm/w)	60	63	67	



DLE-GET75R12





Basic Parameters	
Body structure	Direct
Aluminum Material	AL6063-T5
Surface Processing	Oil spraying
Optical Cover	Anti-glare diffuser
Installation method	Recessed
Size	Φ82X50mm

Customizable



Photo-electric Parameters				
Model	DLE-GET75R12			
Light Source	COB			
Input Voltage	220-240VAC			
power	12W			
CRI	Ra>90			
CCT	2700K	3000K	4000K	
Beam Angle	60°	60°	60°	
Luminous Flux (lm)	530	560	600	
Light Efficiency (lm/w)	44	47	50	




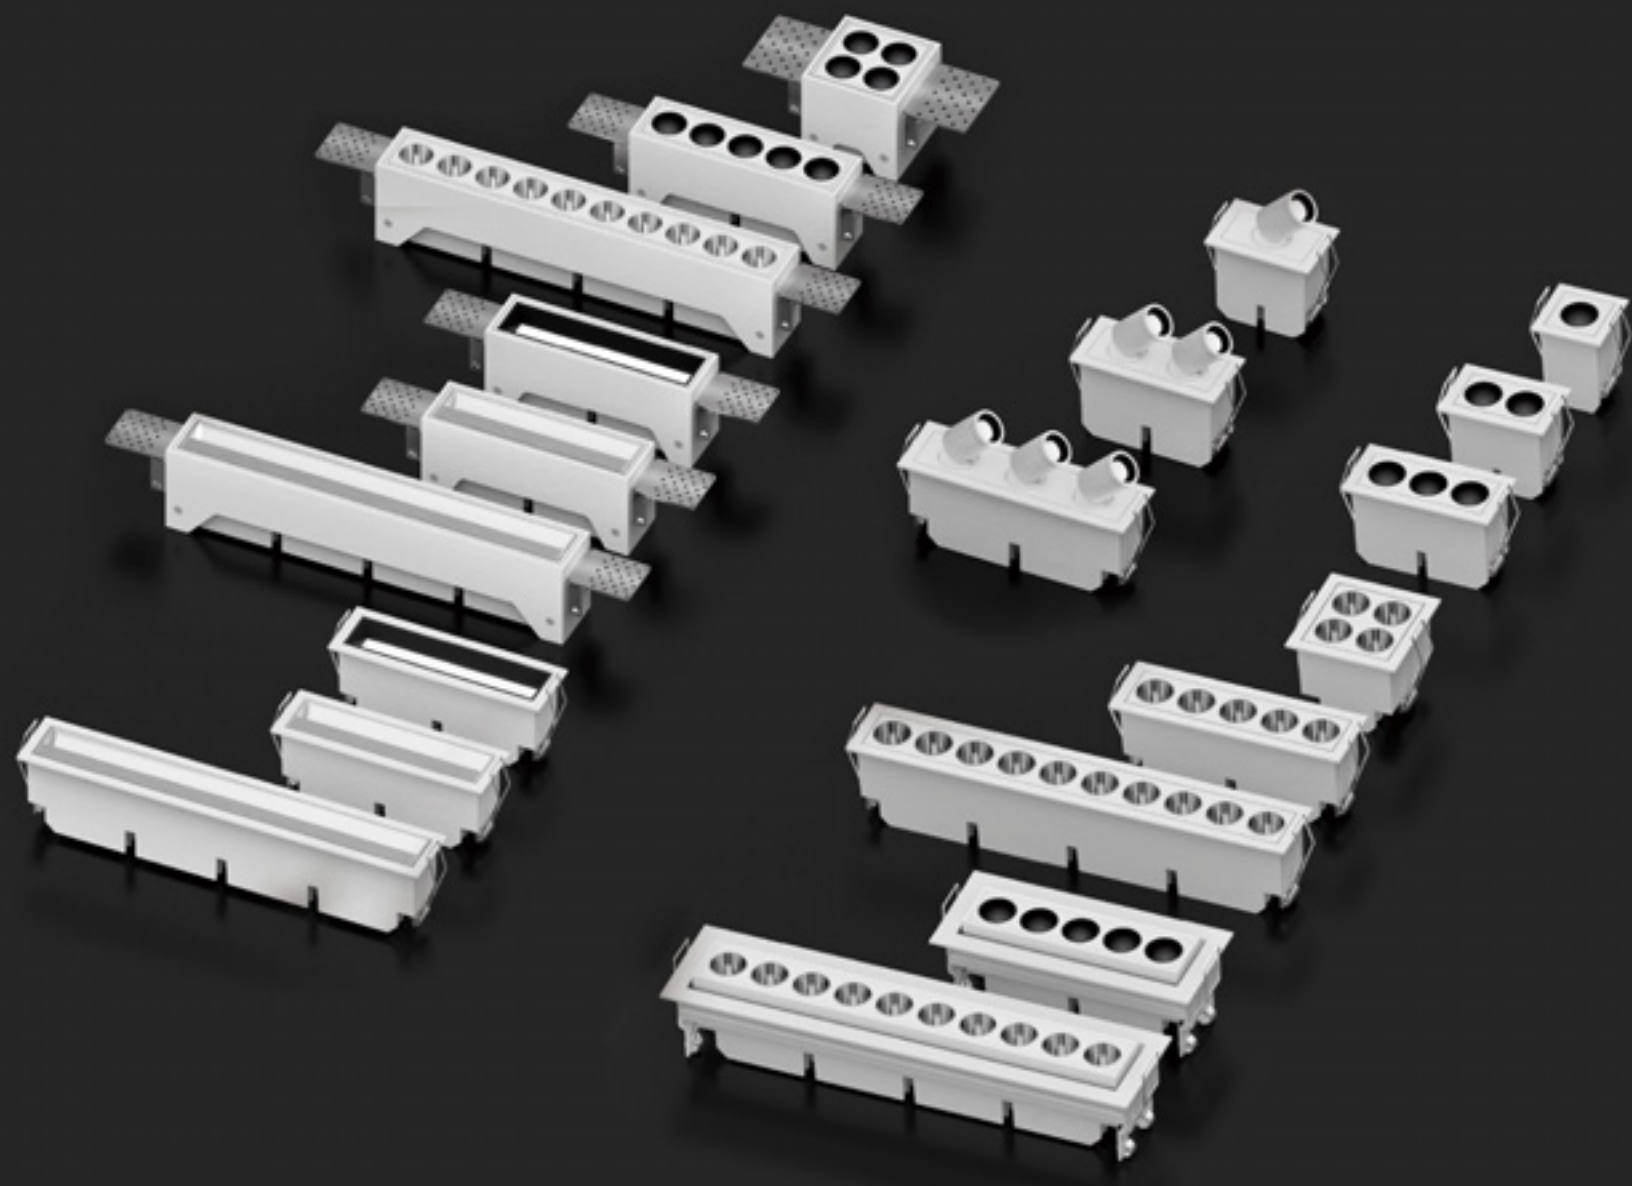

MAGICUBE

MAGICUBE mini grille light is delicate, compact and of linear outlook. It includes 4 optics, including $\pm 20^\circ$ adjustable round grille, retractable spotlight, flood lighting and wall washer and supports recessed, pre-recessed and surface-mounted installation. It can achieve precise accent lighting, basic lighting and wall washing.

GLE-ME35G01

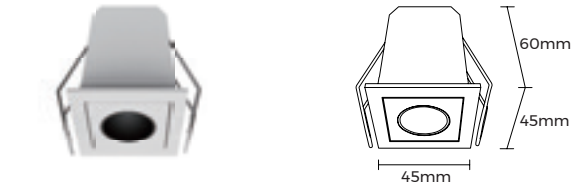


Basic Parameters	
Body structure	Direct
Aluminum Material	ADC12
Surface Processing	Oil Spraying
Optical Cover	Black/ White
Installation	Recessed
Applicable thickness	5-25mm ceiling
Size	45×45×60mm



Photo-electric Parameters			
Light Source	SMD		
Input voltage	220-240VAC		
Current	700mA		
power	3W		
CRI	Ra>90		
CCT	3000K	3500K	4000K
Luminous Flux (lm)	150/140	155/140	160/150
Light efficiency(lm/w)	50/47	51/47	53/50
Beam Angle	30°/45°	30°/45°	30°/45°

Customizable

0/1-10VTriacZigBeeBluetoothDALI dimmingAdjustable

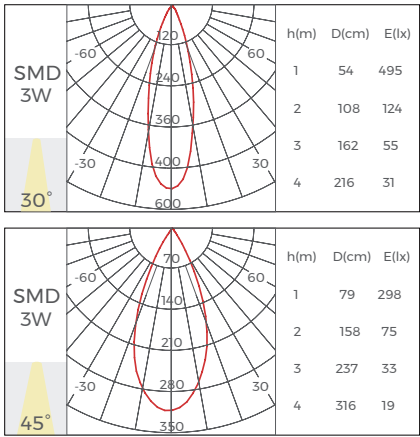

GLE-ME35G02

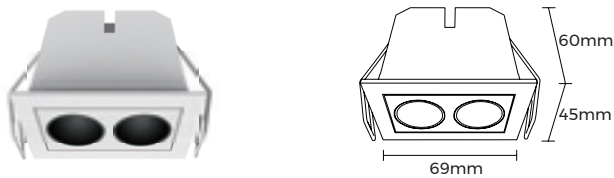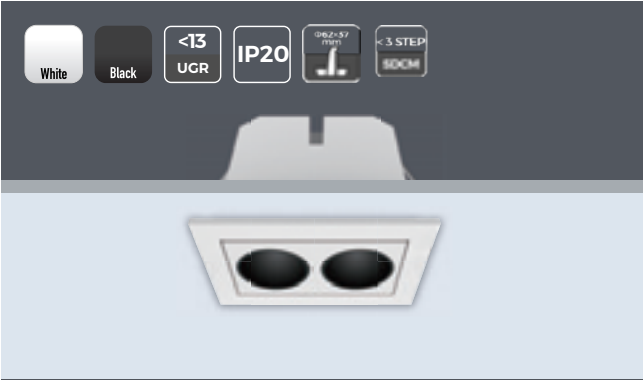


Basic Parameters	
Body structure	Direct
Aluminum Material	ADC12
Surface Processing	Oil Spraying
Optical Cover	Black/ White
Installation	Recessed
Applicable thickness	5-25mm ceiling
Size	69×45×60mm


Photo-electric Parameters			
Light Source	SMD		
Input voltage	220-240VAC		
Current	700mA		
power	6W		
CRI	Ra>90		
CCT	3000K	3500K	4000K
Luminous Flux (lm)	310/260	320/270	330/280
Light efficiency(lm/w)	51/43	53/45	55/47
Beam Angle	30°/45°	30°/45°	30°/45°

Customizable

0/1-10VTriacZigBeeBluetoothDALI dimmingAdjustable

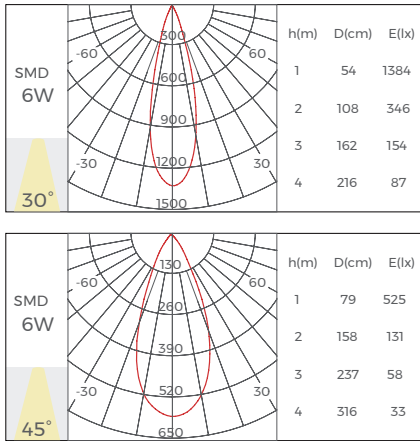

GLE-ME35G03

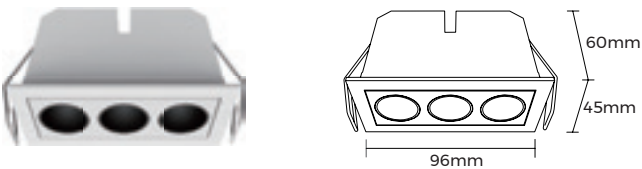

Basic Parameters	
Body structure	Direct
Aluminum Material	ADC12
Surface Processing	Oil Spraying
Optical Cover	Black/White
Installation	Recessed
Applicable thickness	5-25mm ceiling
Size	96×45×60mm

Customizable

0/1-10V Triac ZigBee Bluetooth DALI dimming Adjustable



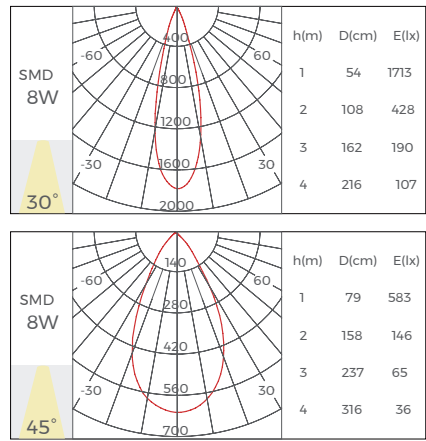


Photo-electric Parameters			
Light Source	SMD		
Input voltage	220-240VAC		
Current	700mA		
power	8W		
CRI	Ra>90		
CCT	3000K	3500K	4000K
Luminous Flux (lm)	460/370	470/380	480/390
Light efficiency(lm/w)	58/46	59/48	60/49
Beam Angle	30°/45°	30°/45°	30°/45°

GLE-ME35G04

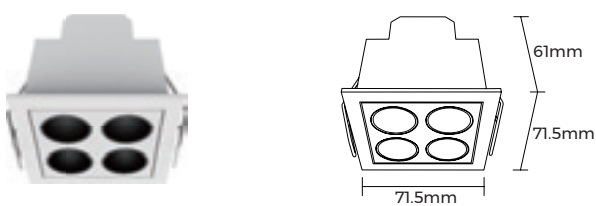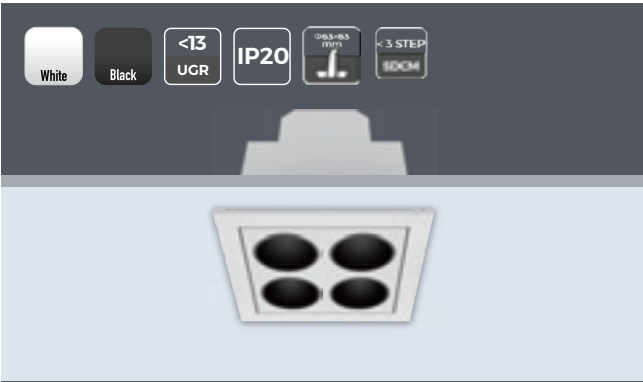

Basic Parameters	
Body structure	Direct
Aluminum Material	ADC12
Surface Processing	Oil Spraying
Optical Cover	Black/White
Installation	Recessed
Applicable thickness	5-25mm ceiling
Size	71.5×71.5×61mm

Customizable

0/1-10V Triac ZigBee Bluetooth DALI dimming Adjustable



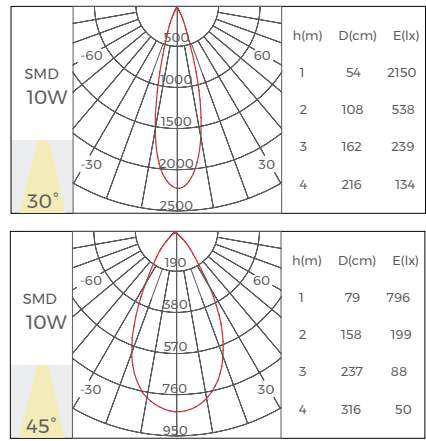


Photo-electric Parameters			
Light Source	SMD		
Input voltage	220-240VAC		
Current	700mA		
power	10W		
CRI	Ra>90		
CCT	3000K	3500K	4000K
Luminous Flux (lm)	640/520	660/530	680/540
Light efficiency(lm/w)	64/52	66/53	68/54
Beam Angle	30°/45°	30°/45°	30°/45°

GLE-ME35G05

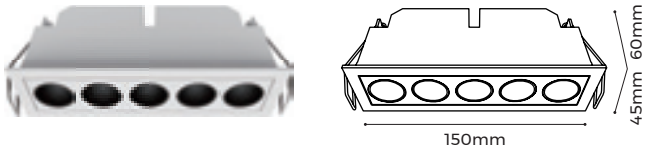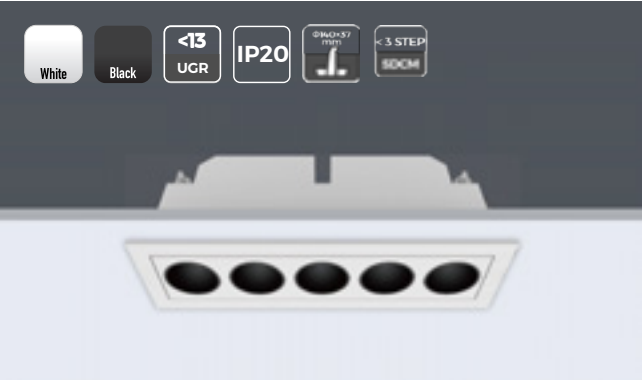

Basic Parameters	
Body structure	Direct
Aluminum Material	ADC12
Surface Processing	Oil Spraying
Optical Cover	Black/White
Installation	Recessed
Applicable thickness	5-25mm ceiling
Size	150×45×60mm

Customizable

0/1-10VTriacZigBeeBluetoothDALI dimmingAdjustable



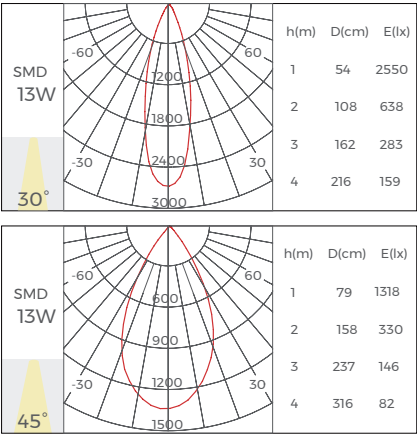


Photo-electric Parameters			
Light Source	SMD		
Input voltage	220-240VAC		
Current	700mA		
power	13W		
CRI	Ra>90		
CCT	3000K	3500K	4000K
Luminous Flux (lm)	760/660	780/680	800/700
Light efficiency(lm/w)	58/51	60/52	62/54

Beam Angle	30°/45°	30°/45°	30°/45°
------------	---------	---------	---------

GLE-ME35G10

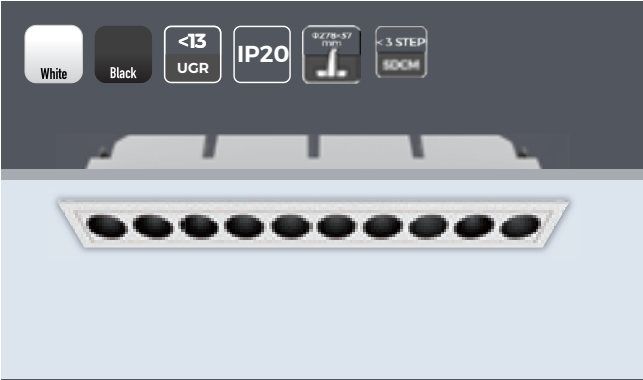

Basic Parameters	
Body structure	Direct
Aluminum Material	ADC12
Surface Processing	Oil Spraying
Optical Cover	Black/White
Installation	Recessed
Applicable thickness	5-25mm ceiling
Size	285×45×60mm

Customizable

0/1-10VTriacZigBeeBluetoothDALI dimmingAdjustable



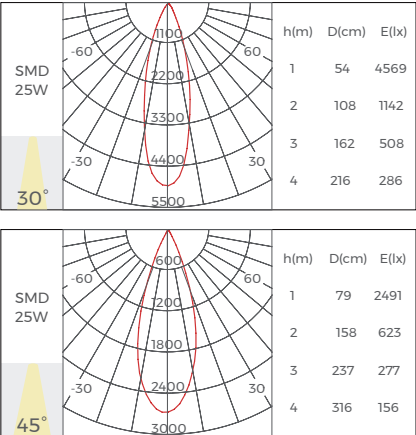


Photo-electric Parameters			
Light Source	SMD		
Input voltage	220-240VAC		
Current	700mA		
power	25W		
CRI	Ra>90		
CCT	3000K	3500K	4000K
Luminous Flux (lm)	1550/1400	1600/1440	1640/1470
Light efficiency(lm/w)	62/56	64/58	66/59

Beam Angle	30°/45°	30°/45°	30°/45°
------------	---------	---------	---------

GLE-ME35GA05

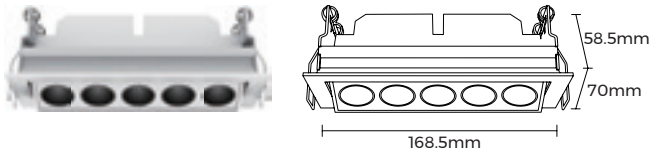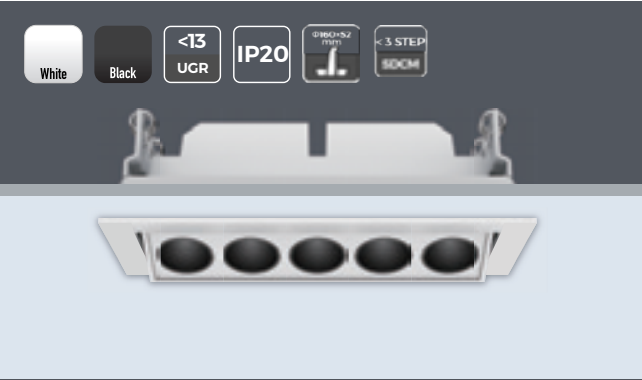

Basic Parameters	
Body structure	Angle adjustable
Aluminum Material	ADC12
Surface Processing	Oil Spraying
Optical Cover	Black/White
Installation	Recessed
Applicable thickness	5-25mm ceiling
Size	168.5×70×58.5mm

Customizable

0/1-10VTriacZigBeeBluetoothDALI dimmingAdjustable



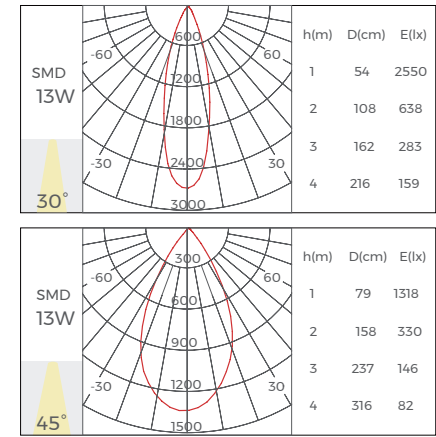


Photo-electric Parameters			
Light Source	SMD		
Input voltage	220-240VAC		
Current	700mA		
power	13W		
CRI	Ra>90		
CCT	3000K	3500K	4000K
Luminous Flux (lm)	760/660	780L/680	800/700
Light efficiency(lm/w)	58/51	60/52	62/54v

Beam Angle	30°/45°	30°/45°	30°/45°
------------	---------	---------	---------

GLE-ME35GA10

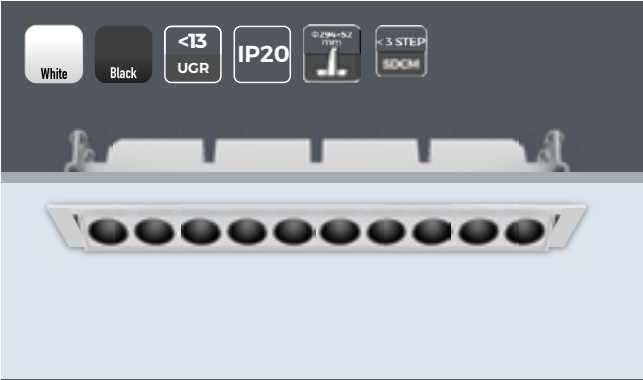

Basic Parameters	
Body structure	Angle adjustable
Aluminum Material	ADC12
Surface Processing	Oil Spraying
Optical Cover	Black/White
Installation	Recessed
Applicable thickness	5-25mm ceiling
Size	304×70×58.5mm

Customizable

0/1-10VTriacZigBeeBluetoothDALI dimmingAdjustable



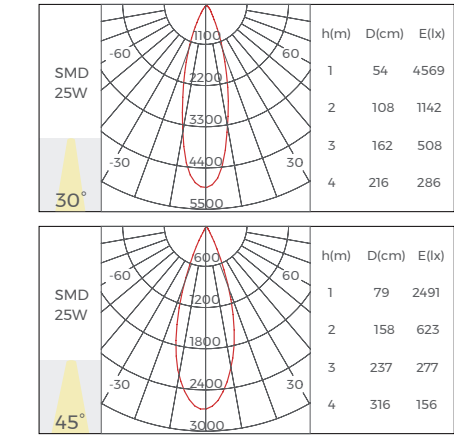


Photo-electric Parameters			
Light Source	SMD		
Input voltage	220-240VAC		
Current	700mA		
power	25W		
CRI	Ra>90		
CCT	3000K	3500K	4000K
Luminous Flux (lm)	1550/1400	1600/1440	1640/1470
Light efficiency(lm/w)	62/56	64/58	66/59

Beam Angle	30°/45°	30°/45°	30°/45°
------------	---------	---------	---------

GLE-ME35W15

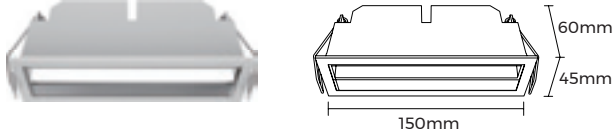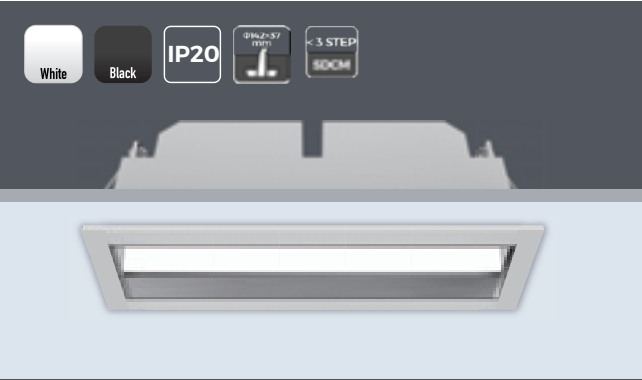

Basic Parameters	
Body structure	Direct
Aluminum Material	ADC12
Surface Processing	Oil Spraying
Optical Cover	Black/ White
Installation	Recessed
Applicable thickness	5-25mm ceiling
Size	150×45×60mm

Customizable

0/1-10VTriacZigBeeBluetoothDALI dimmingAdjustable



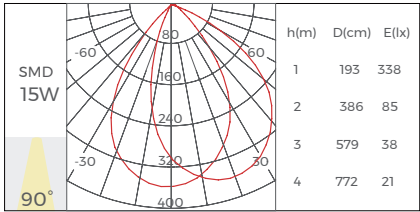


Photo-electric Parameters			
Light Source	SMD		
Input voltage	220-240VAC		
Current	700mA		
power	15W		
CRI	Ra>90		
CCT	3000K	3500K	4000K
Luminous Flux (lm)	700	710	730
Light efficiency(lm/w)	47	47	49
Beam Angle	90°	90°	90°

GLE-ME35W24

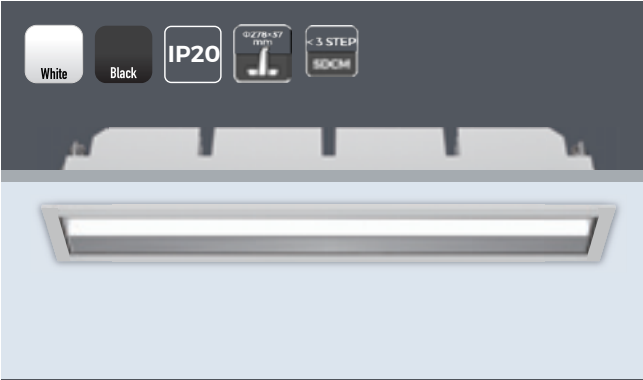

Basic Parameters	
Body structure	Direct
Aluminum Material	ADC12
Surface Processing	Oil Spraying
Optical Cover	Black/ White
Installation	Recessed
Applicable thickness	5-25mm ceiling
Size	285×45×60mm

Customizable

0/1-10VTriacZigBeeBluetoothDALI dimmingAdjustable



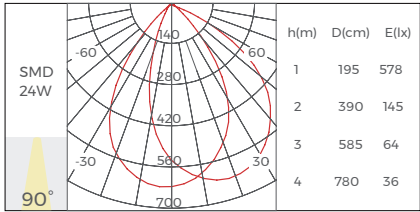


Photo-electric Parameters			
Light Source	SMD		
Input voltage	220-240VAC		
Current	700mA		
power	24W		
CRI	Ra>90		
CCT	3000K	3500K	4000K
Luminous Flux (lm)	1280	1320	1350
Light efficiency(lm/w)	53	55	56
Beam Angle	90°	90°	90°

GLE-ME35D15

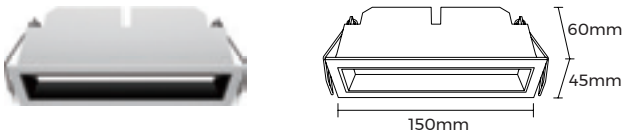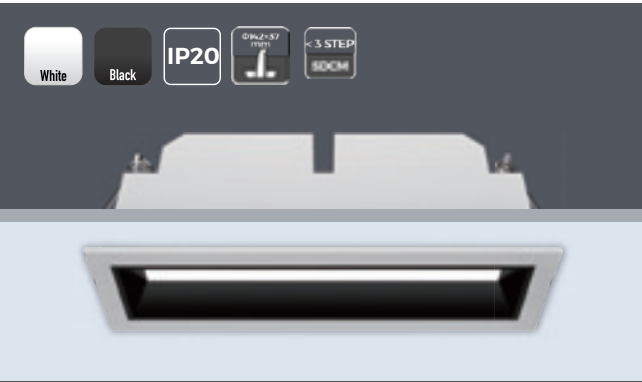

Basic Parameters	
Body structure	Direct
Aluminum Material	ADC12
Surface Processing	Oil Spraying
Optical Cover	Black/White
Installation	Recessed
Applicable thickness	5-25mm ceiling
Size	150×45×60mm

Customizable



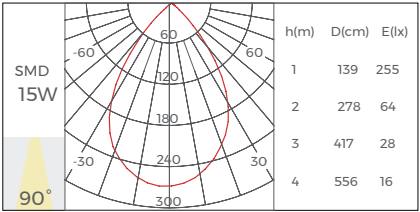


Photo-electric Parameters			
Light Source	SMD		
Input voltage	220-240VAC		
Current	700mA		
power	15W		
CRI	Ra>90		
CCT	3000K	3500K	4000K
Luminous Flux (lm)	430	440	450
Light efficiency(lm/w)	29	29	30

Beam Angle	80°	80°	80°
------------	-----	-----	-----

GLE-ME35S01

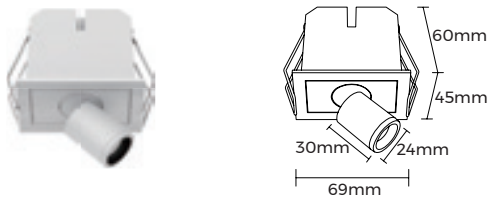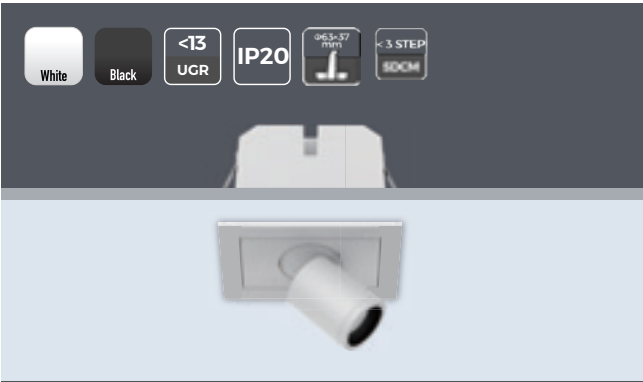

Basic Parameters	
Body structure	Angle adjustable
Aluminum Material	ADC12
Surface Processing	Oil Spraying
Optical Cover	Black/White
Installation	Recessed
Applicable thickness	5-25mm ceiling
Size	69×45×60mm

Customizable




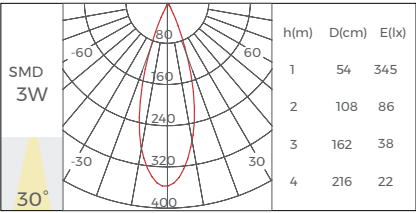


Photo-electric Parameters			
Light Source	SMD		
Input voltage	220-240VAC		
Current	700mA		
power	3W		
CRI	Ra>90		
CCT	3000K	3500K	4000K
Luminous Flux (lm)	170/170	180/180	190/190
Light efficiency(lm/w)	57/57	60/60	63/63

Beam Angle	20°/30°	20°/30°	20°/30°
------------	---------	---------	---------

GLE-ME35S02

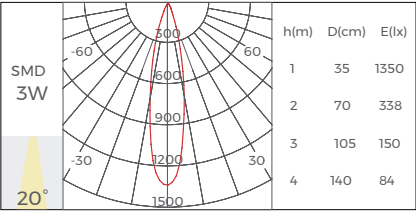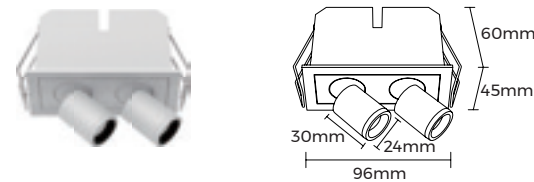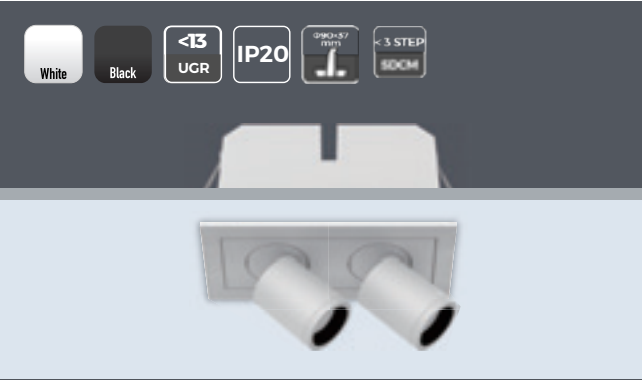

Basic Parameters	
Body structure	Angle adjustable
Aluminum Material	ADC12
Surface Processing	Oil Spraying
Optical Cover	Black/ White
Installation	Recessed
Applicable thickness	5-25mm ceiling
Size	96×45×60mm

Customizable

0/1-10VTriacZigBeeBluetoothDALI dimmingAdjustable



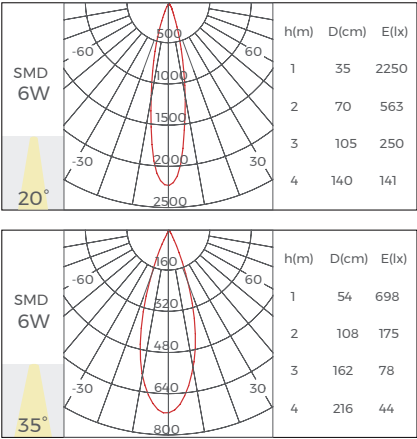


Photo-electric Parameters			
Light Source	SMD		
Input voltage	220-240VAC		
Current	700mA		
power	6W		
CRI	Ra>90		
CCT	3000K	3500K	4000K
Luminous Flux (lm)	400/380	410/390	420/400
Light efficiency(lm/w)	67/63	68/65	70/67
Beam Angle	20°/30°	20°/30°	20°/30°

GLE-ME35S03

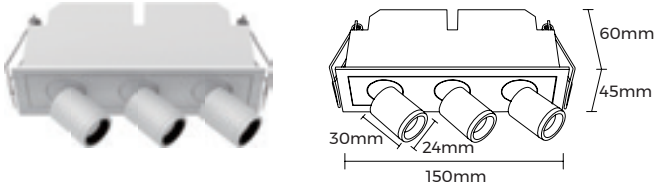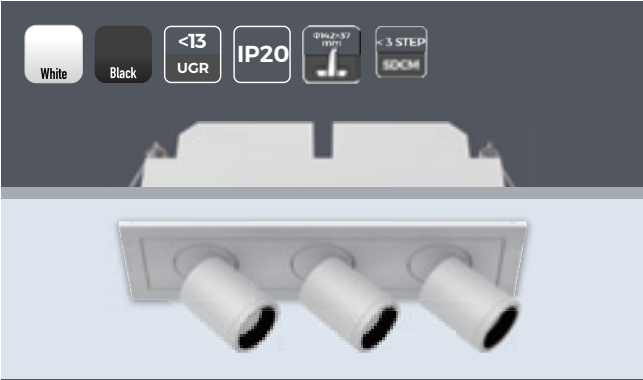

Basic Parameters	
Body structure	Angle adjustable
Aluminum Material	ADC12
Surface Processing	Oil Spraying
Optical Cover	Black/ White
Installation	Recessed
Applicable thickness	5-25mm ceiling
Size	150×45×60mm

Customizable

0/1-10VTriacZigBeeBluetoothDALI dimmingAdjustable



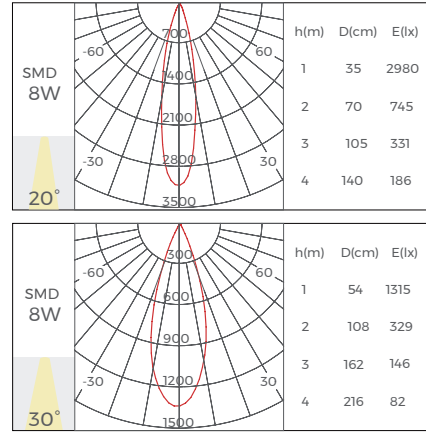


Photo-electric Parameters			
Light Source	SMD		
Input voltage	220-240VAC		
Current	700mA		
power	8W		
CRI	Ra>90		
CCT	3000K	3500K	4000K
Luminous Flux (lm)	570/550	590/570	600/580
Light efficiency(lm/w)	71/69	73/71	75/73
Beam Angle	20°/30°	20°/30°	20°/30°

GLE-MR35G04

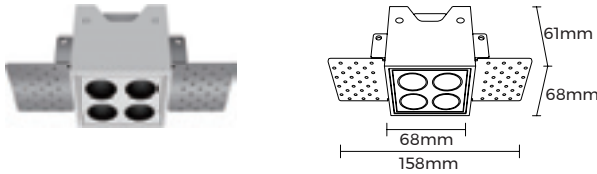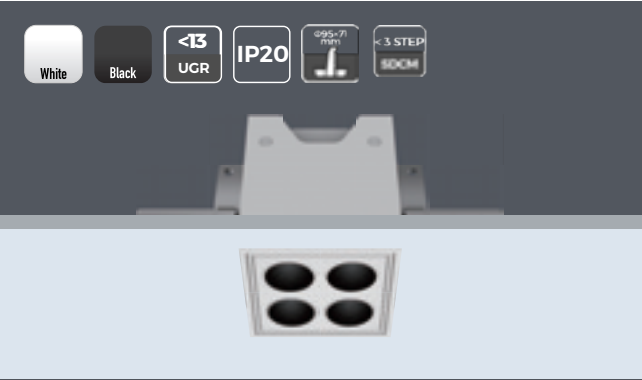

Basic Parameters	
Body structure	Angle adjustable
Aluminum Material	ADC12
Surface Processing	Oil Spraying
Optical Cover	Black/White
Installation	Trimless Pre-recessed
Applicable thickness	5-25mm ceiling
Size	158X68X68mm

Customizable

0/1-10VTriacZigBeeBluetoothDALI dimmingAdjustable



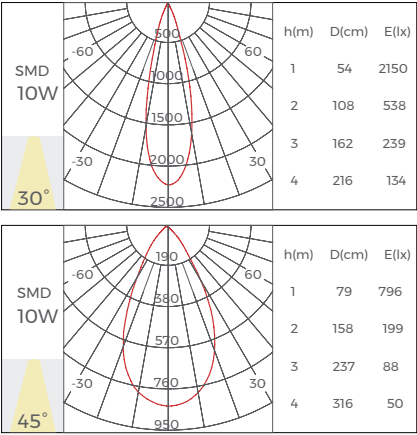


Photo-electric Parameters			
Light Source	SMD		
Input voltage	220-240VAC		
Current	700mA		
power	10W		
CRI	Ra>90		
CCT	3000K	3500K	4000K
Luminous Flux (lm)	640/520	660/530	680/540
Light efficiency(lm/w)	64/52	66/53	68/54

Beam Angle	30°/45°	30°/45°	30°/45°
------------	---------	---------	---------

GLE-MR35G05

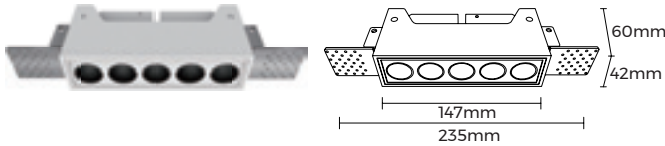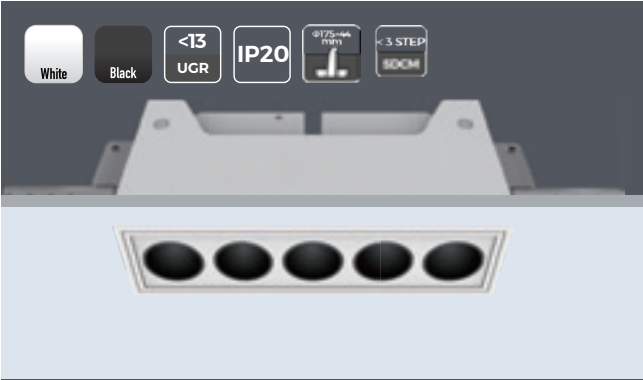

Basic Parameters	
Body structure	Angle adjustable
Aluminum Material	ADC12
Surface Processing	Oil Spraying
Optical Cover	Black/White
Installation	Trimless Pre-recessed
Applicable thickness	5-25mm ceiling
Size	237X42X65mm

Customizable

0/1-10VTriacZigBeeBluetoothDALI dimmingAdjustable



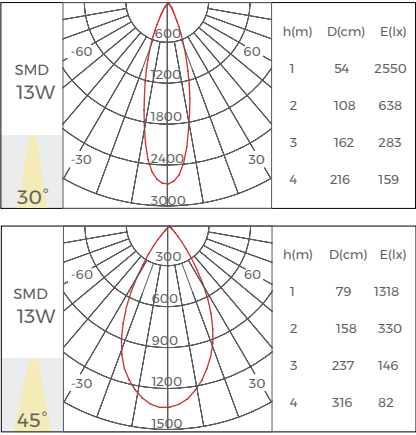


Photo-electric Parameters			
Light Source	SMD		
Input voltage	220-240VAC		
Current	700mA		
power	13W		
CRI	Ra>90		
CCT	3000K	3500K	4000K
Luminous Flux (lm)	760/660	780L/680	800/700
Light efficiency(lm/w)	58/51	60/52	62/5

Beam Angle	30°/45°	30°/45°	30°/45°
------------	---------	---------	---------

GLE-MR35G10

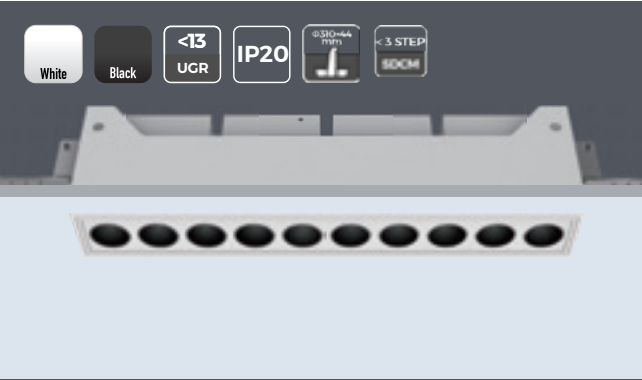

Basic Parameters	
Body structure	Angle adjustable
Aluminum Material	ADC12
Surface Processing	Oil Spraying
Optical Cover	Black/ White
Installation	Trimless Pre-recessed
Applicable thickness	5-25mm ceiling
Size	372×42×65mm

Customizable

0/1-10VTriacZigBeeBluetoothDALI dimmingAdjustable



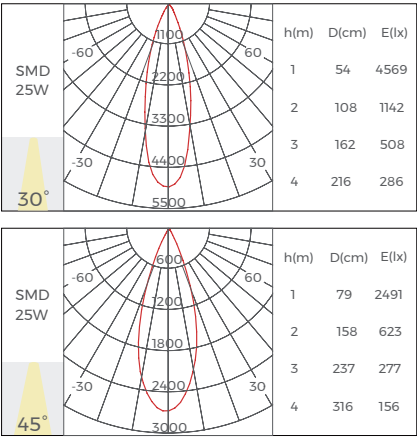


Photo-electric Parameters			
Light Source	SMD		
Input voltage	220-240VAC		
Current	700mA		
power	25W		
CRI	Ra>90		
CCT	3000K	3500K	4000K
Luminous Flux (lm)	1550/1400	1600/1400	1640/1470
Light efficiency(lm/w)	62/56	64/58	66/59

Beam Angle	30°/45°	30°/45°	30°/45°
------------	---------	---------	---------

GLE-MR35W15

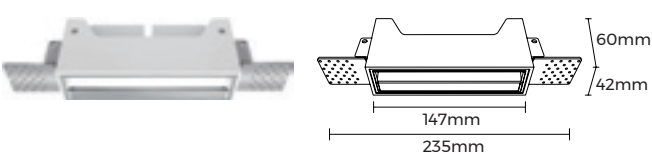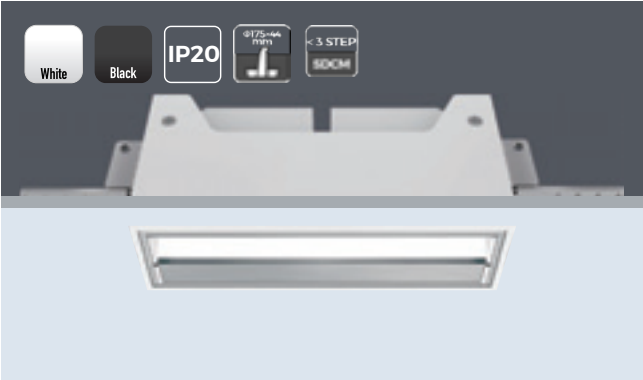

Basic Parameters	
Body structure	Direct
Aluminum Material	ADC12
Surface Processing	Oil Spraying
Optical Cover	Black/ White
Installation	Trimless Pre-recessed
Applicable thickness	5-25mm ceiling
Size	235×42×60mm

Customizable

0/1-10VTriacZigBeeBluetoothDALI dimmingAdjustable



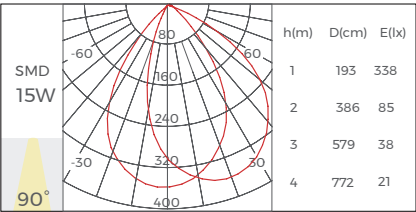


Photo-electric Parameters			
Light Source	SMD		
Input voltage	220-240VAC		
Current	700mA		
power	15W		
CRI	Ra>90		
CCT	3000K	3500K	4000K
Luminous Flux (lm)	700	710	730
Light efficiency(lm/w)	63/55	65/57	67/58

Beam Angle	90°	90°	90°
------------	-----	-----	-----

GLE-MR35W24

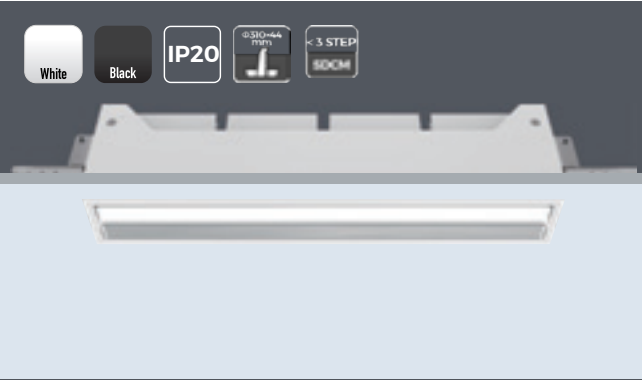

Basic Parameters	
Body structure	Direct
Aluminum Material	ADC12
Surface Processing	Oil Spraying
Optical Cover	Black/ White
Installation	Trimless Pre-recessed
Applicable thickness	5-25mm ceiling
Size	372×42×60mm

Customizable



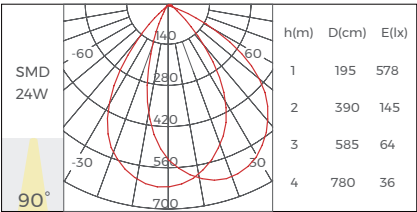


Photo-electric Parameters			
Light Source	SMD		
Input voltage	220-240VAC		
Current	700mA		
power	24W		
CRI	Ra>90		
CCT	3000K	3500K	4000K
Luminous Flux (lm)	1280	1320	1350
Light efficiency(lm/w)	53	55	56

Beam Angle	90°	90°	90°
------------	-----	-----	-----

GLE-MR35D15

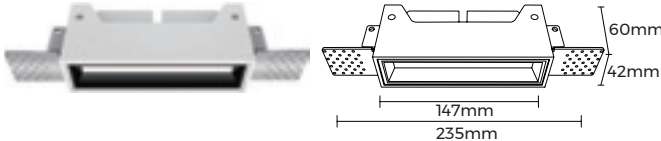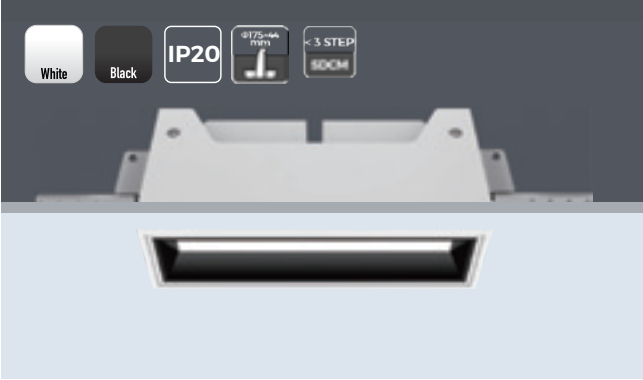

Basic Parameters	
Body structure	Direct
Aluminum Material	ADC12
Surface Processing	Oil Spraying
Optical Cover	Black/ White
Installation	Trimless Pre-recessed
Applicable thickness	5-25mm ceiling
Size	237×42×65mm

Customizable



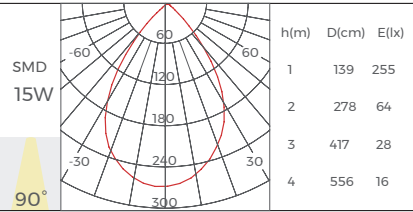


Photo-electric Parameters			
Light Source	SMD		
Input voltage	220-240VAC		
Current	700mA		
power	15W		
CRI	Ra>90		
CCT	3000K	3500K	4000K
Luminous Flux (lm)	430	440	450
Light efficiency(lm/w)	29	29	30

Beam Angle	80°	80°	80°
------------	-----	-----	-----

GLE-MM35G03

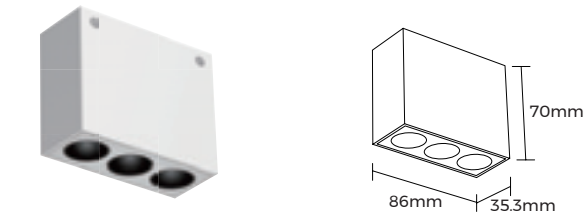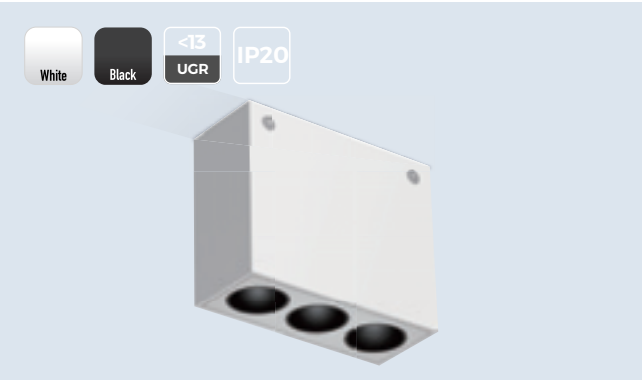

Basic Parameters	
Body structure	Direct
Aluminum Material	ADC12
Surface Processing	Oil Spraying
Optical Cover	Black/ White
Installation	Surface mounted
Size	86×35.3×70mm

Customizable

0/1-10V Triac ZigBee Bluetooth DALI dimming Adjustable



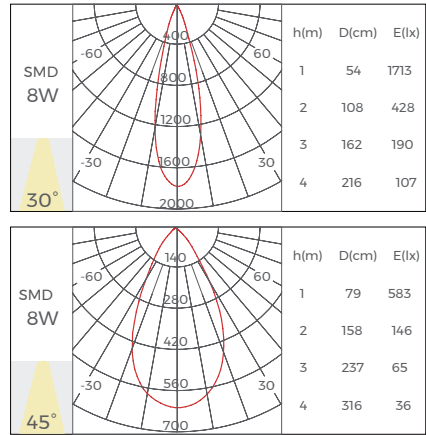


Photo-electric Parameters			
Light Source	SMD		
Input voltage	220-240VAC		
Current	700mA		
power	8W		
CRI	Ra>90		
CCT	3000K	3500K	4000K
Luminous Flux (lm)	460/370	470/380	480/390
Light efficiency(lm/w)	58/46	59/48	60/49
Beam Angle	30°/45°	30°/45°	30°/45°

GLE-MM35G04

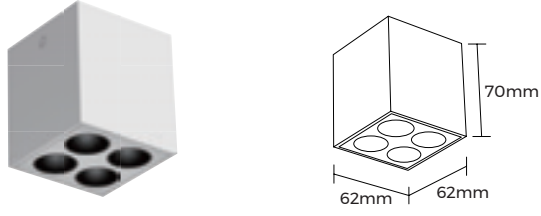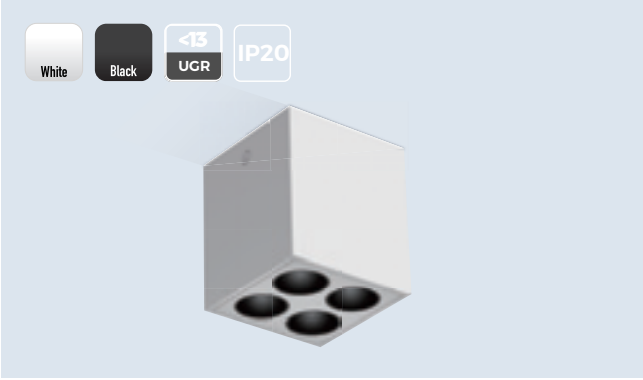

Basic Parameters	
Body structure	Direct
Aluminum Material	ADC12
Surface Processing	Oil Spraying
Optical Cover	Black/ White
Installation	Surface mounted
Size	61×61×70mm

Customizable

0/1-10V Triac ZigBee Bluetooth DALI dimming Adjustable



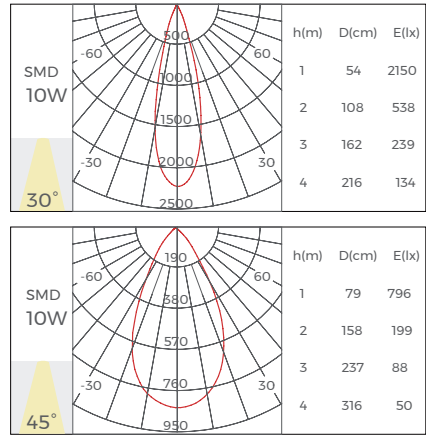


Photo-electric Parameters			
Light Source	SMD		
Input voltage	220-240VAC		
Current	700mA		
power	10W		
CRI	Ra>90		
CCT	3000K	3500K	4000K
Luminous Flux (lm)	640/520	660/530	680/540
Light efficiency(lm/w)	64/52	66/53	68/54
Beam Angle	30°/45°	30°/45°	30°/45°

GLE-MM35G05

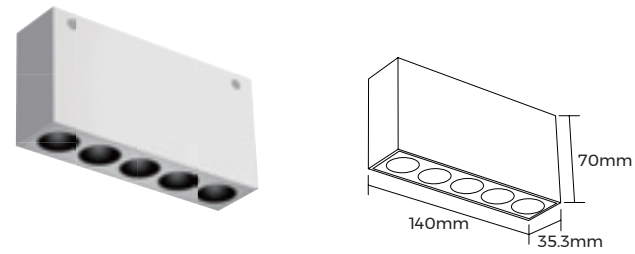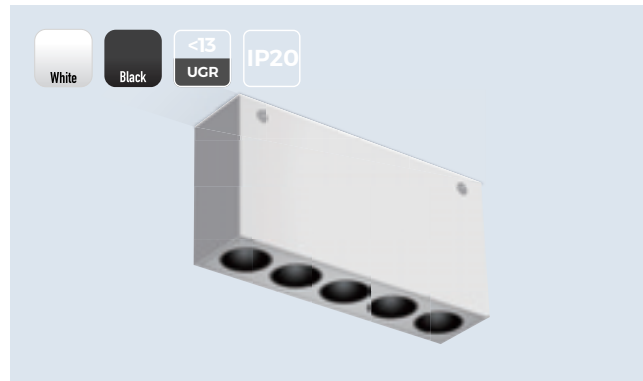

Basic Parameters

Body structure	Direct
Aluminum Material	ADC12
Surface Processing	Oil Spraying
Optical Cover	Black/ White
Installation	Surface mounted
Size	140×35.3×70mm

Photo-electric Parameters

Light Source	SMD		
Input voltage	220-240VAC		
Current	700mA		
power	12W		
CRI	Ra>90		
CCT	3000K	3500K	4000K
Luminous Flux (lm)	760/660	780/680	800/700
Light efficiency(lm/w)	58/51	60/52	62/54
Beam Angle	30°/45°	30°/45°	30°/45°

Customizable

